


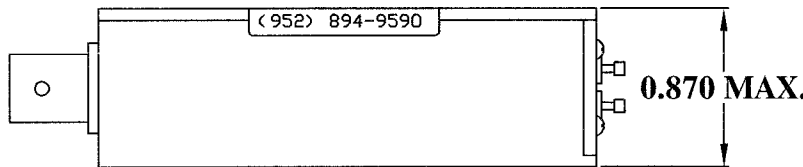


MECHANICAL

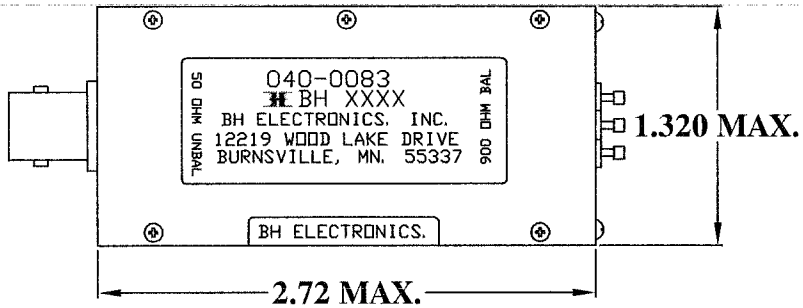

SCHEMATIC

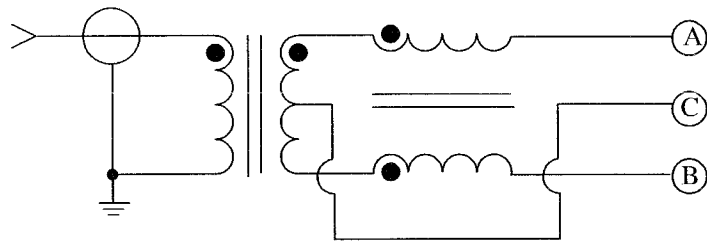

ELECTRICAL SPECIFICATIONS


INSERTION LOSS: 2dB MAX. 200Hz - 1.2 MHz
(2 UNITS BACK TO BACK)

RETURN LOSS: (BI-DIRECTIONAL)
17.5dB MIN. 200Hz - 500 Hz
20dB MIN. 500Hz - 750 KHz

17.5dB MIN. 750 KHz - 1.0 MHz

15dB MIN. 1.0 MHz - 1.2 MHz

COMMON MODE REJECTION: 50dB MIN. 200Hz - 1.2 MHz

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG <input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	TITLE: 50:900 OHM DSL TEST BALUN
				ENGR: N. DOOSE	
B	1-23-07	UPDATE ELECTRICAL SPECS.	<i>ND</i>	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005 PAGE 1 OF 1	PART NO. 040-0083
A	4-4-00	CUSTOMER PRINT (Q10122-3)	NGD		
ISSUE	DATE	REVISION	BY		