

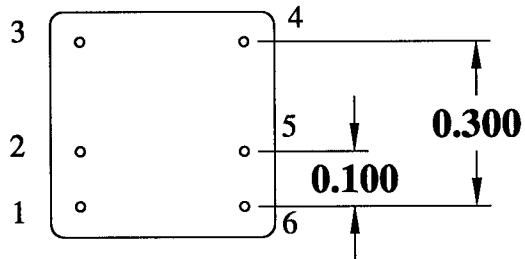
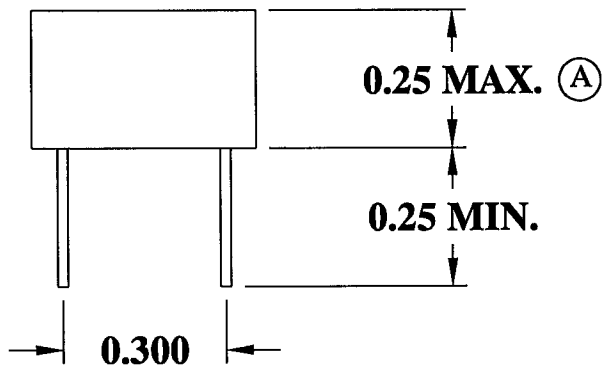


MECHANICAL

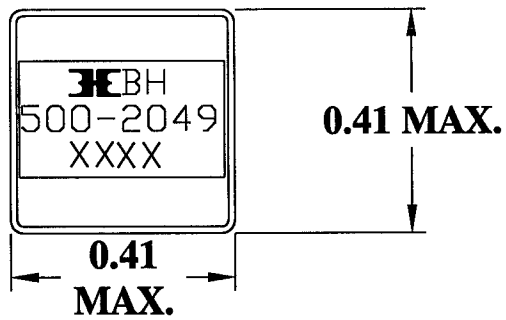

SCHEMATIC

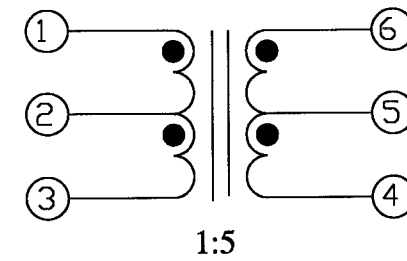

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1CT:5CT


OPEN CIRCUIT INDUCTANCE: 400uH MIN. (1-3) 100 KHz 30mV

PRIMARY LEAKAGE INDUCTANCE: 0.2uH NOM.

INTERWINDING CAPACITANCE: 40pF NOM.

HIGH VOLTAGE TEST: 500 VAC/ 1 SEC.

ET CONSTANT: 18.3Vu SEC. MIN.

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG	
				DRAWN: K. LOFTUS	
				ENGR: B. MARKS	
B	12-15-00	UPDATE TO CADD	<i>BM</i>	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005 PAGE 1 OF 1	TITLE: TRANSFORMER
A	6-29-95	CUSTOMER PRINT	BM		PART NO. 500-2049
ISSUE	DATE	REVISION	BY		