

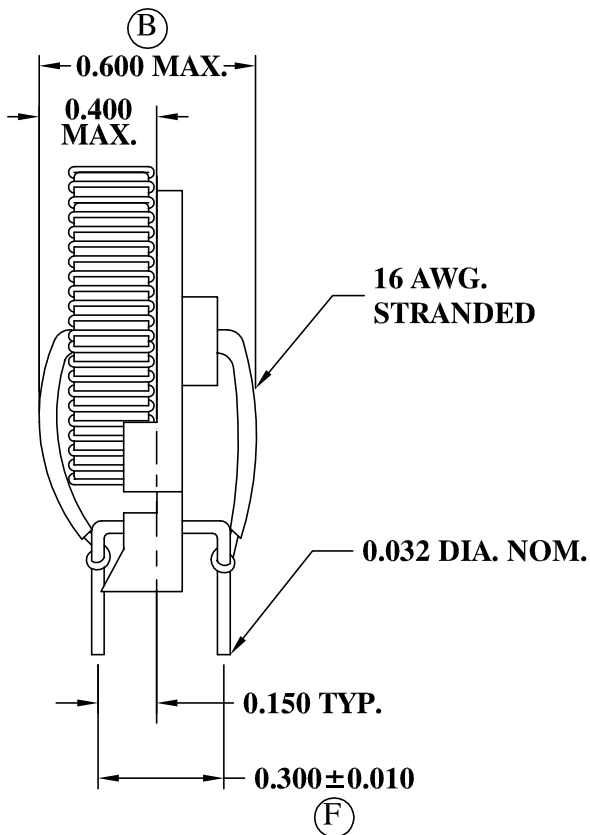



MECHANICAL

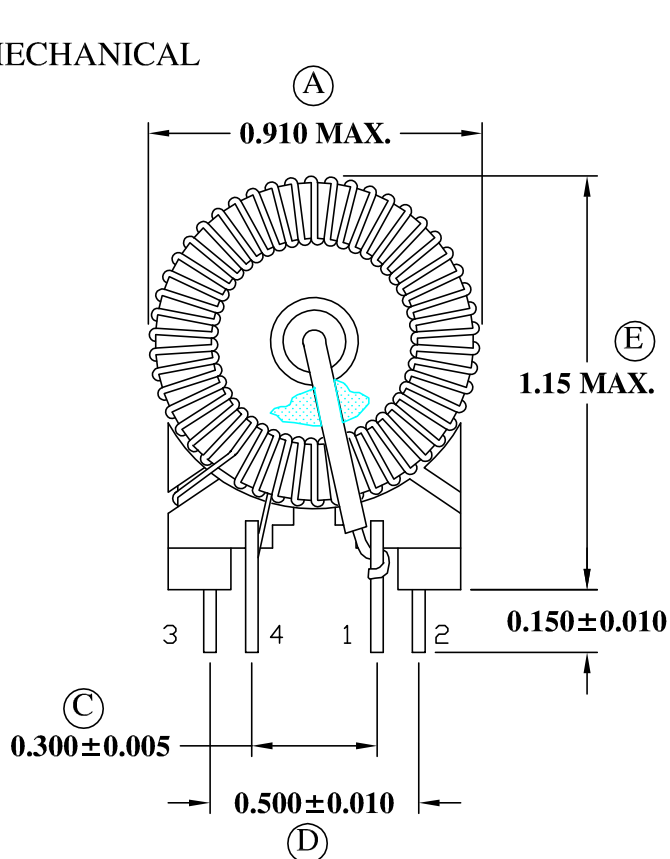

SCHEMATIC

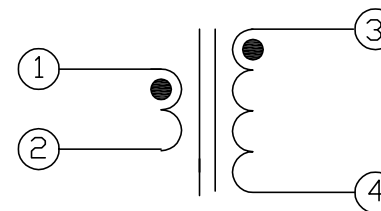

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:200

OPEN CIRCUIT INDUCTANCE: 87mH MIN. (3-4) 10 KHz 100mV

DC RESISTANCE: (1-2) 0.0010 OHMS NOM.

(3-4) 2.80 OHMS NOM.

HIGH VOLTAGE TEST: 3000 VAC 1 SEC. (1-3) CONFORMAL COAT COIL

ISSUE	DATE	REVISION (Q10225)	BY
L	2-13-12	NOW BH CATALOG	<i>km</i>
K	10-4-02	CORRECT TOL. ON .300±.010 TO ±0.005	BM
J	11-8-01	ECR #5367 WIDTH .910 MAX.	BM
H	3-23-01	ECR #4991 CUST. REV. A	BM

DESIGN PER:	BH CATALOG
DRAWN:	K. LOFTUS
ENGR:	B. MARKS
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
PAGE 1 OF 1	

BH [®] BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics

TITLE: **TRANSFORMER**

PART NO. **500-2456**