



MECHANICAL

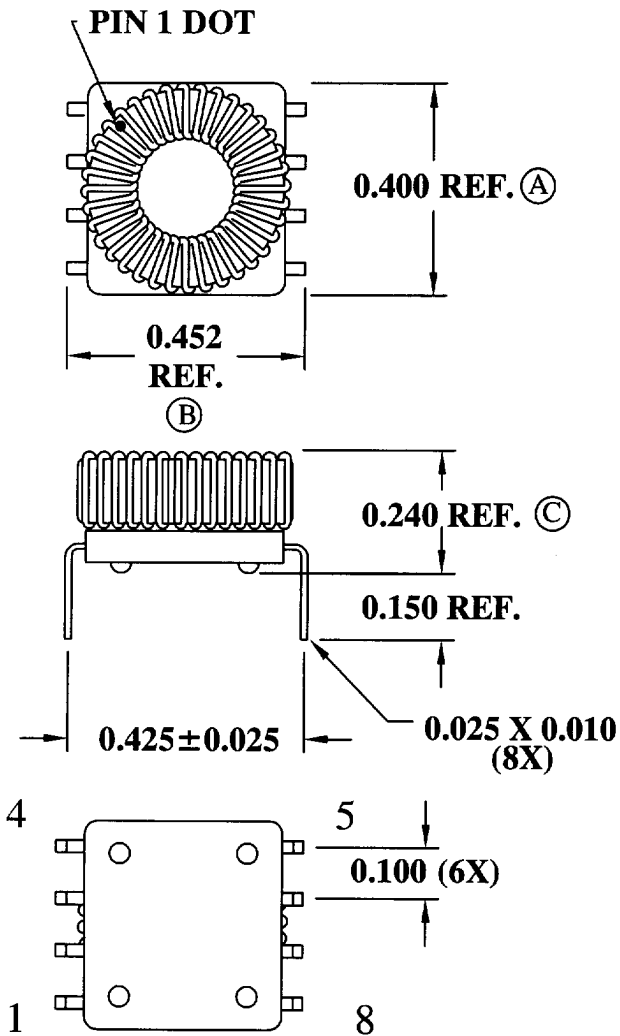

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1


OPEN CIRCUIT INDUCTANCE: 9mH MIN. 100 KHz 100mV (1-8) (4-5)

PRIMARY LEAKAGE INDUCTANCE: 0.5μH NOM. 120 KHz 50mV (1-8 SH 4, 5)

INTERWINDING CAPACITANCE: 55pF NOM. 120 KHz 50mV (1-4)

DC RESISTANCE: 1.125 OHMS NOM. (1-8) (4-5)

HIGH VOLTAGE TEST: 250 VAC / 1 SEC. (1-4)

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG	
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: B. GASS	TITLE: CHOKE
A	1-9-04	CUSTOMER PRINT (Q11516-1)	B.G.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	PART NO. 501-0971
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1	