


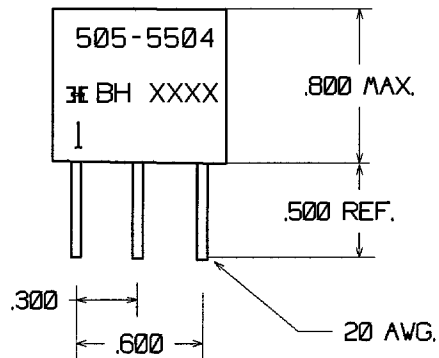


MECHANICAL

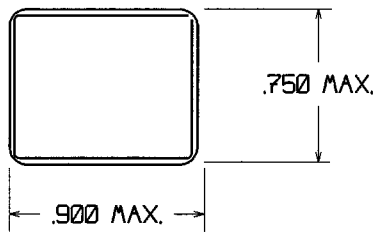

SCHEMATIC

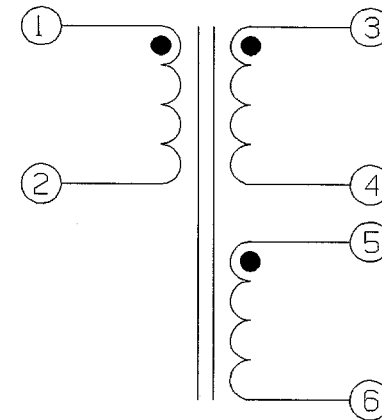

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1:1


OPEN CIRCUIT INDUCTANCE: .25mH MIN. (1-2)

PRIMARY LEAKAGE INDUCTANCE: 5μH MAX. (1-2 SHORT 3-4, 5-6)

INTERWINDING CAPACITANCE: 20pF MAX. (1-2 TO 3-4)  
(1-2 TO 5-6)

HIGH VOLTAGE TEST: 2500 VRMS FOR 1 SEC. (1-3) (1-5)

ET CONSTANT: 45Vμ SEC. MIN.

			DESIGNED PER:	 <b>BH</b> ELECTRONICS INC. BURNSVILLE - MARSHALL
			BH CATALOG	
			DRAWN: K. LOFTUS	TITLE SCR TRIGGER TRANSFORMER
			ENGR. J. DECRAMER	
			UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES. TOLERANCES NON-CUMULATIVE.	PART NO. 505-5504
A	10-16-97	CUSTOMER PRINT	.XX +/- .01 .XXX +/- .005	
ISSUE	DATE	REVISIONS	SCALE 1:	SHEET 1 / 1