


MECHANICAL



NOTE: "X" ON BOTTOM OF CASE INDICATES PIN 5

SCHEMATIC

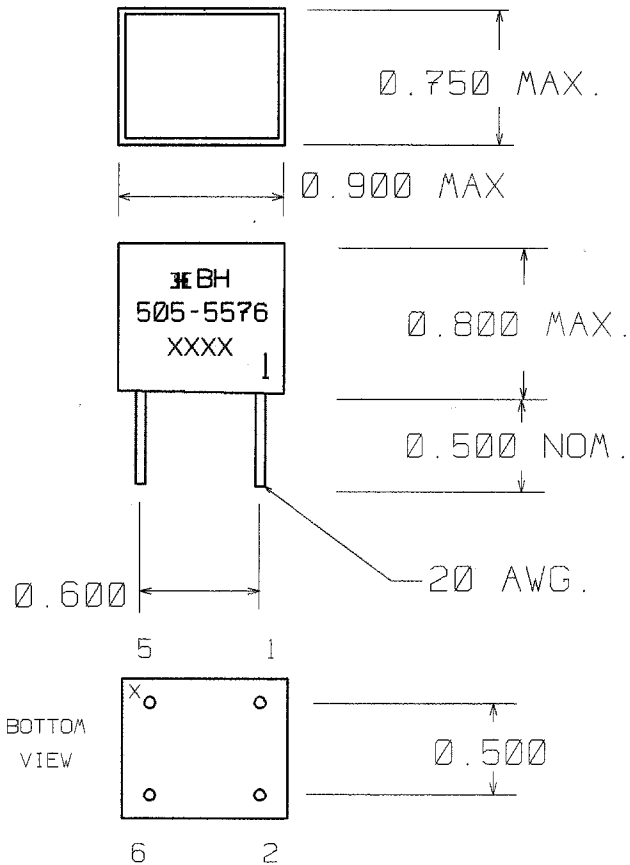

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 20mH MIN. (1-5)


PRIMARY LEAKAGE INDUCTANCE: 200  $\mu$ H MAX. (1-5 SHORT 2-6)

INTERWINDING CAPACITANCE: 50 pF MAX. (1-5 TO 2-6)

DC RESISTANCE: (1-5) 6.0 OHMS MAX.

(2-6) 6.0 OHMS MAX.

HIGH VOLTAGE TEST: 2500 VRMS / 1 SEC. (2-1)

			DESIGNED PER:	 BH ELECTRONICS INC. BURNSVILLE--MARSHALL
			BH CATALOG	
			DRAWN: K. LOFTUS	TITLE  <b>TRANSFORMER</b>
			ENGR.	
			UNLESS OTHERWISE SPECIFIED; DIMENSIONS IN INCHES. TOLERANCES NON-CUMULATIVE.	
A	1-24-94	CUSTOMER PRINT	DO NOT SCALE   SHEET 1 / 1	PART NO.  <b>505-5576</b>
ISSUE	DATE	REVISIONS		