



MECHANICAL

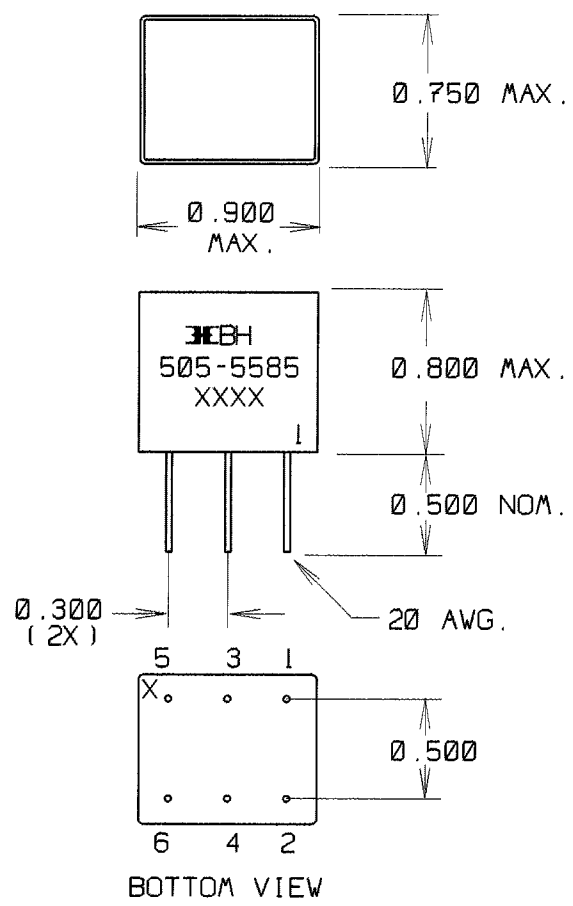


SCHEMATIC



ELECTRICAL SPECIFICATIONS

- URNS RATIO: 5:1:1
- OPEN CIRCUIT INDUCTANCE: 20.0mH MIN. (1-5)
- PRIMARY LEAKAGE INDUCTANCE: 200uH MAX.
- INTERWINDING CAPACITANCE: 50pF MAX.
- DC RESISTANCE: 5.0 OHMS MAX.
 2.0 OHMS MAX.
 2.0 OHMS MAX.
- HIGH VOLTAGE TEST: 2500 VRMS
- ET CONSTANT: 360 V_U SEC. MIN.

			DESIGNED PER:	 BH ELECTRONICS INC. BURNSVILLE -- MARSHALL
			BH CATALOG	
			DRAWN: K. LOFTUS	
			ENGR.	TITLE
			UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES. TOLERANCES NON-CUMULATIVE.	TRANSFORMER, SCR
A	5-20-96	CUSTOMER PRINT	.XX +/- 0.01 .XXX +/- 0.005	PART NO.
ISSUE	DATE	REVISIONS	SCALE 1:	SHEET 1 / 1
				505-5585