



MECHANICAL

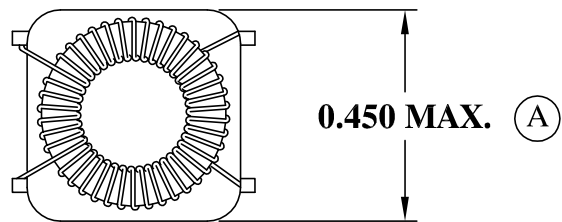


0.450 MAX. (A)

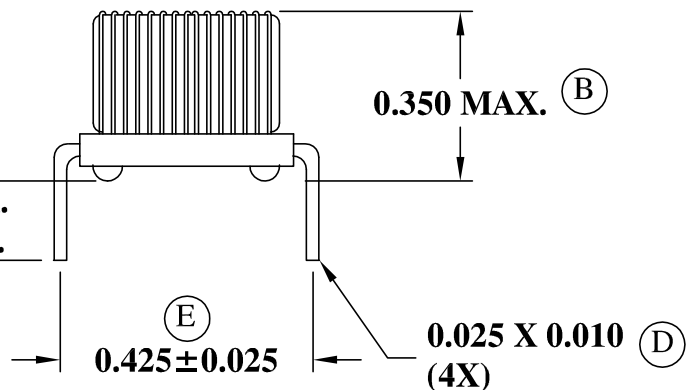

0.350 MAX. (B)

0.150 MAX.  
0.125 MIN. (C)


0.425 ± 0.025 (E)  
0.025 X 0.010 (4X) (D)

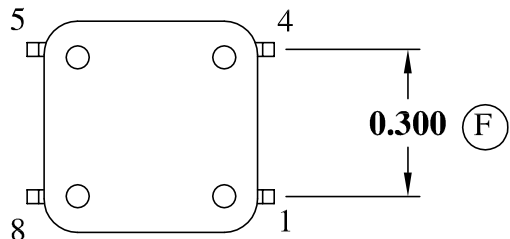

0.300 (F)

FREQUENCY MHz	NORMALIZED ATTENUATION dB'S
0.100	0.0
0.333	0.0
1.000	6.0
3.333	16.0
10.00	25.0
33.00	20.0
50.0	17.0
100.0	10.0

SCHEMATIC



ELECTRICAL SPECIFICATIONS


OPEN CIRCUIT INDUCTANCE: 33uH NOM. (1-8, 4-5)

100 KHz 20mV

INTERWINDING CAPACITANCE: 20pF MAX.

HIGH VOLTAGE TEST: 1000 VDC WINDING TO WINDING

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				DRAWN: K. LOFTUS	TITLE: TRANSFORMER
				ENGR: J. DECRAMER	
B	2-13-12	NOW BH CATALOG	JDC	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005 PAGE 1 OF 1	PART NO. L00-1164
A	6-24-05	CUSTOMER PRINT	JDC		
ISSUE	DATE	REVISION	BY		