
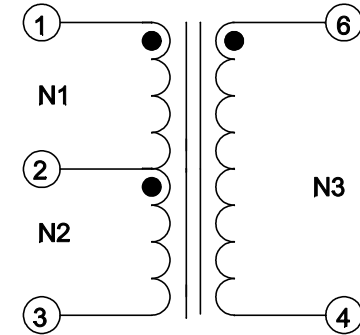
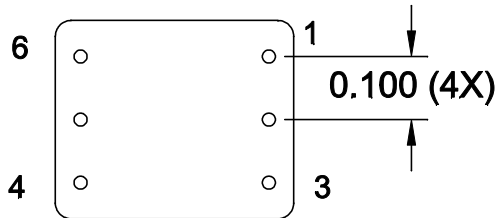
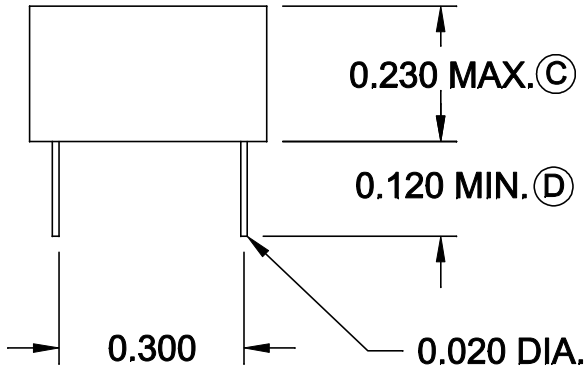


MECHANICAL

SCHEMATIC

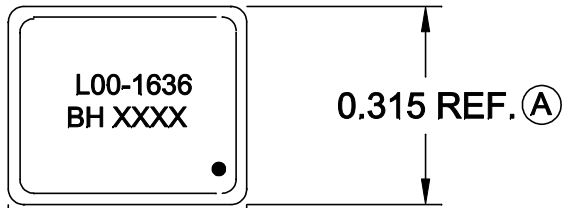

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1CT

OPEN CIRCUIT INDUCTANCE: 500uH MIN. (1-3, 4-6)
120 KHz 100mV

DC RESISTANCE: 2 OHMS MAX. (1-3)

ET CONSTANT: 30Vu SEC. MIN. (BIPOLAR)

HIGH VOLTAGE TEST: 1800 VRMS / 1 SEC.

PRIMARY LEAKAGE INDUCTANCE: 0.8uH MAX. @ 100 KHz
(1-3 WITH 6-4 SHORTED)

DESIGN PER:

BH CATALOG

CUSTOM

NON-PROPRIETARY

X

DRAWN: KALANI SA

ENGR: T. GOODRICH

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS IN INCHES, TOLERANCES
NON-CUMULATIVE
.XX±.01 .XXX±.005

PAGE 1 OF 1



BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics

TITLE:

TRANSFORMER

PART NO.

L00-1636

ISSUE	DATE	REVISION	BY
C	1-14-15	ADD LEAKAGE INFORMATION	JDC
B	3-17-06	UPDATE ELECTRICALS	JDC
A	9-30-05	CUSTOMER PRINT	JDC