

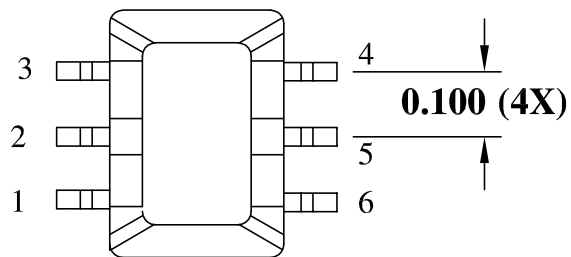
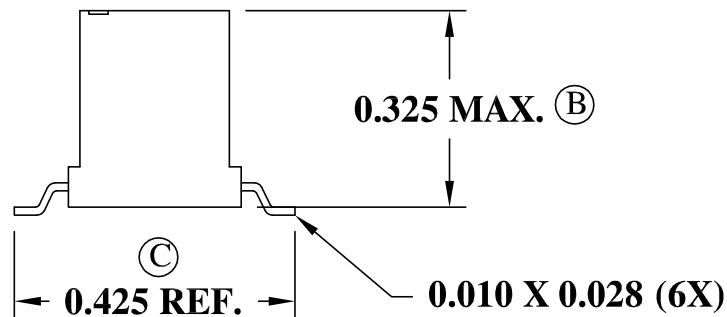



**MECHANICAL**

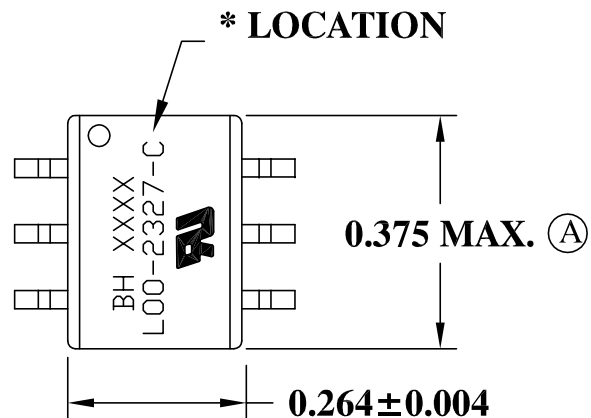

**SUGGESTED PAD LAYOUT**

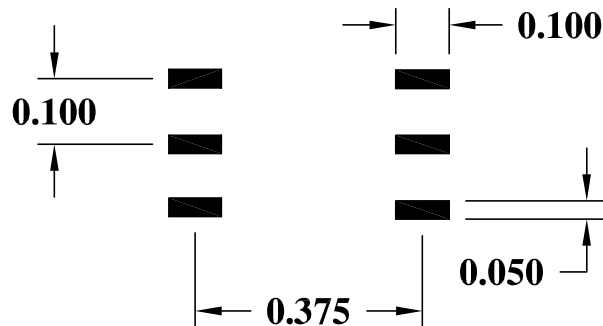

**SCHEMATIC**

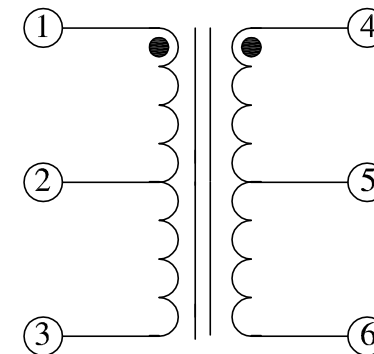

**ELECTRICAL SPECIFICATIONS**

URNS RATIO: 1CT:1.3CT

OPEN CIRCUIT INDUCTANCE: 400µH MIN. (1-3) 10 KHz 100mV

PRIMARY LEAKAGE INDUCTANCE: 25µH MAX. (1-3 SH 4-6)

INTERWINDING CAPACITANCE: 10pF MAX. (1-3 TO 4-6)

DC RESISTANCE: 0.6 OHMS NOM. (1-3) (4-6)

HIGH VOLTAGE TEST: 3000 VRMS / 1 SEC. (1-6)

ET CONSTANT: 18 Vµ SEC. (BIPOLAR)

IR REFLOW: 245°C MAX.


**\* LOCATION**



**MARSHALL - L00-2327**

**CHINA - L00-2327-C**

**MEXICO - L00-2327-A**

**RoHS Compliant**


				DESIGN PER:	 <b>BH ELECTRONICS, INC.</b> BURNSVILLE & MARSHALL, MN  © 1998 BH Electronics
				<b>BH CATALOG</b>	
E	2-13-12	REVISE * LOCATION	<i>fom</i>	DRAWN: K. LOFTUS	TITLE: <b>TRANSFORMER</b>  PART NO. <b>L00-2327</b>
D	7-15-10	ADD PAGE 2	BM	ENGR: B. MARKS	
C	6-24-10	REVISE LABEL	BM	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
B	11-2-05	RoHS COMPLIANT	BM		
A	8-17-05	CUSTOMER PRINT	BM		
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	

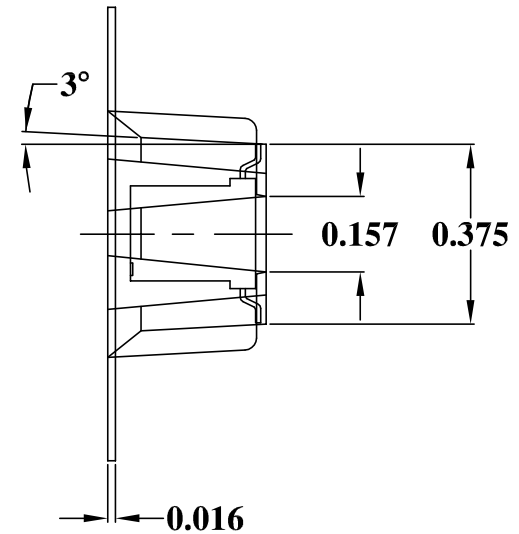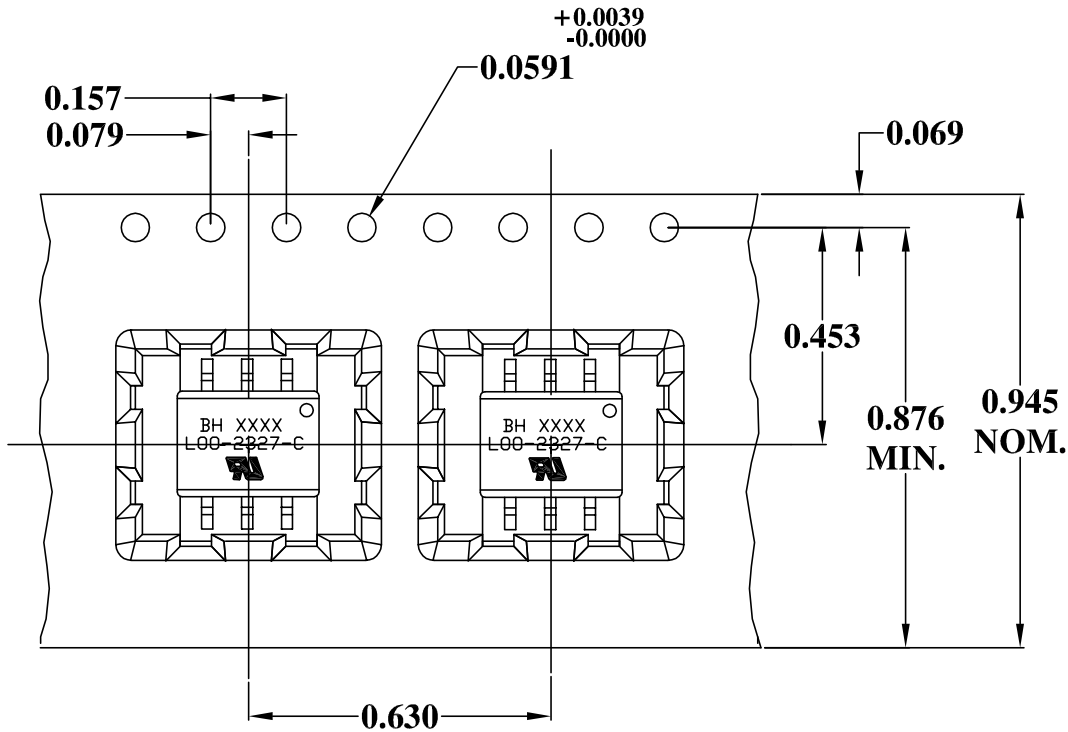

- NOTE: 1. MATERIAL: CPS-101,0.41-MM THICK  
 2. WIDTH (MM) 24  
 3. PITCH (MM): 16  
 4. POCKETS/M: 62.5  
 5. METERS/REEL: 27  
 6. POCKETS/REEL: 1687

811-0315

RoHS Compliant

				DESIGN PER:	 <b>BH ELECTRONICS, INC.</b> BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<b>BH CATALOG</b>	
E	2-13-12	REVISE * LOCATION		DRAWN: K. LOFTUS	
D	7-15-10	ADD PAGE 2	BM	ENGR: B. MARKS	
C	6-24-10	REVISE LABEL	BM	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
B	11-2-05	RoHS COMPLIANT	BM		TITLE: <b>TRANSFORMER</b>
A	8-17-05	CUSTOMER PRINT	BM		PART NO. <b>L00-2327</b>
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	