






MECHANICAL

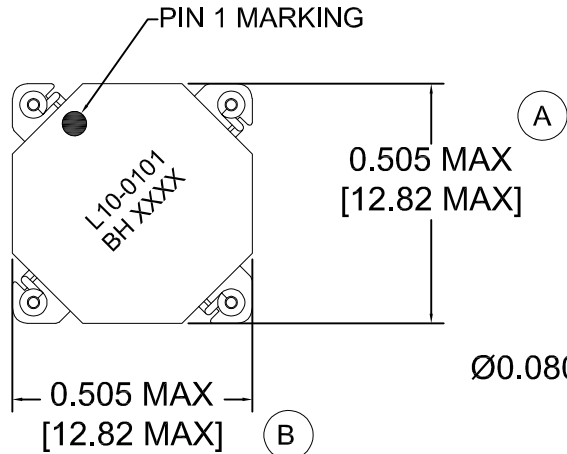

RECOMMENDED PC BOARD LAYOUT

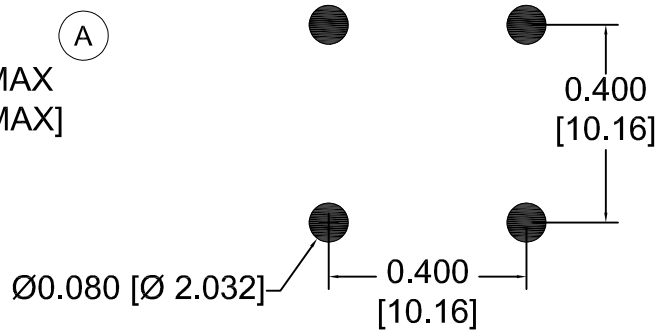

SCHEMATIC

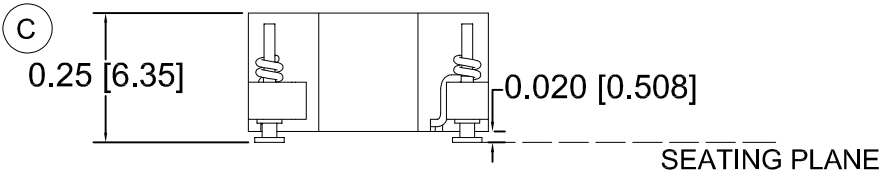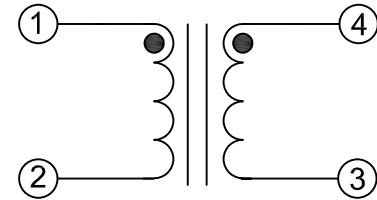

COPLANARITY
0.004" [0.1016]

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 41 μ H NOM. (1,4-2,3)
10 KHz 100mV

DC RESISTANCE: 0.008 OHMS NOM. (1,4-2,3)

IR: 1K MEGOHMS MIN. @ 500 VDC (1-4)

IMPEDANCE: 1 MHz - 200 Ω MIN.
10 MHz - 800 Ω MIN.
100 MHz - 700 Ω MIN.

PRIMARY LEAKAGE INDUCTANCE: 0.100 μ H NOM. (1-2 SH 3,4)
120 KHz 50mV

CURRENT RATING: 5.6 A

RoHS COMPLIANT

DESIGN PER:

BH CATALOG

CUSTOM

NON-PROPRIETARY

DRAWN: KALANI SA

ENGR: J. DECRAMER

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS IN INCHES, TOLERANCES
NON-CUMULATIVE
.XX \pm .01 .XXX \pm .005

PAGE 1 OF 2



BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics


TITLE:

COMMON MODE CHOKE


PART NO.

L10-0101

ISSUE	DATE	REVISION	BY
D	10-28-16	UPDATE CURRENT RATING	JDC
C	7-10-14	UPDATE ELECTRICAL.	
B	6-3-14	UPDATE MECH.	
A	1-17-08	CUSTOMER PRINT Q10128	

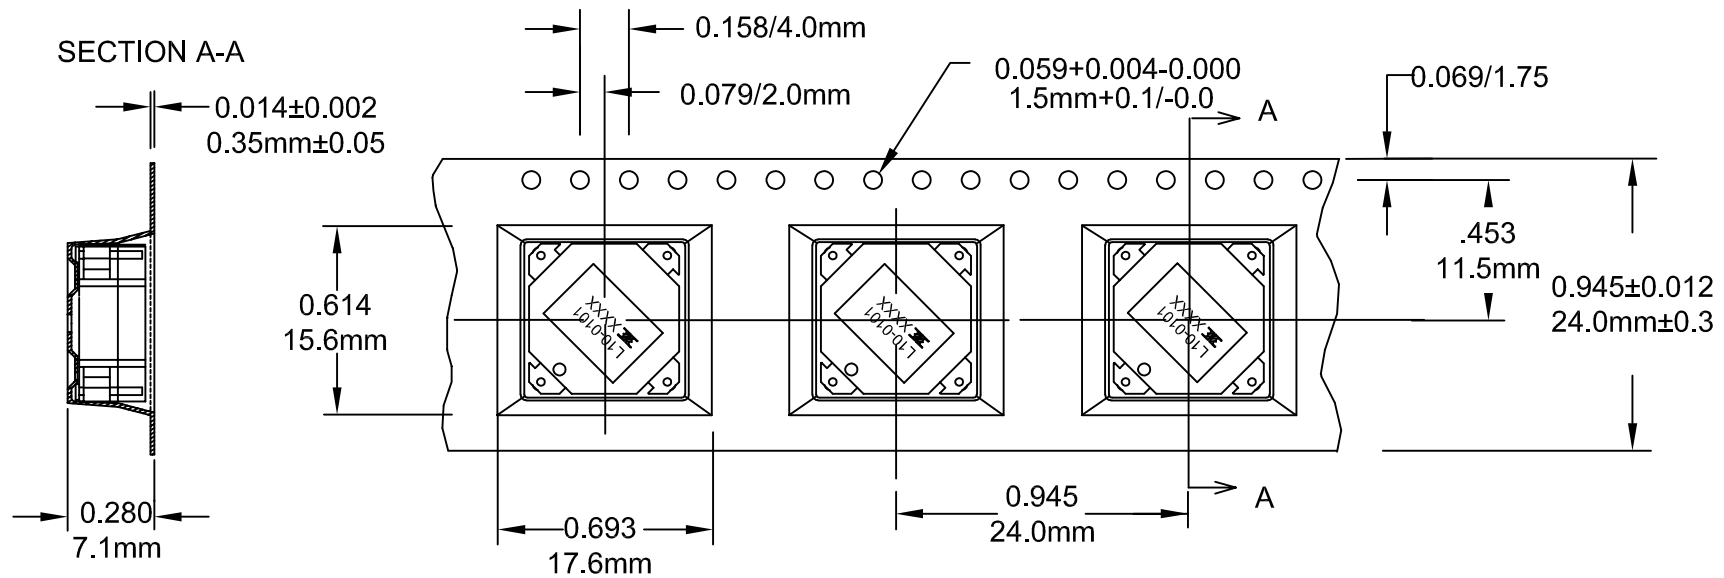

CARRIER TAPE 811-0137

				DESIGNED PER:	 ® BH Electronics, Inc. Burnsville & Marshall, MN © 1998 BH Electronics
				BH CATALOG	
				CUSTOM NON-PROPRIETARY <input checked="" type="checkbox"/>	
				DRAWN KALANI SA	
D	10-28-16	UPDATE CURRENT RATING		ENGR. J. DECRAMER	TITLE:
C	7-10-14	UPDATE ELECTRICAL.		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE. .XX±.01 .XXX±.005	COMMON MODE CHOKE
B	7-10-14	UPDATE MECHANICALS			PART NO.
A	1-17-08	CUSTOMER PRINT			L10-0101
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	