

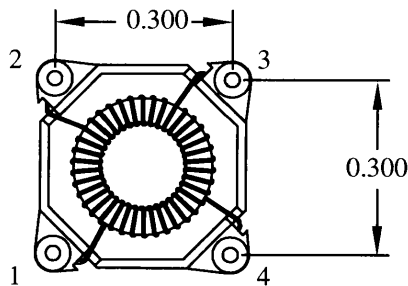
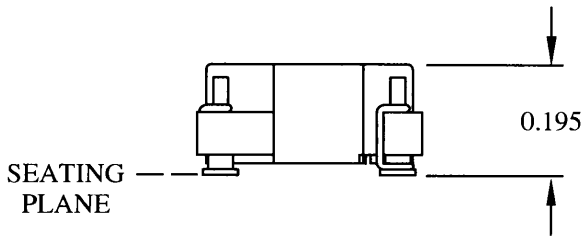



MECHANICAL

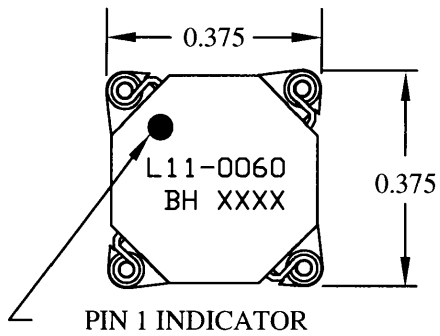

FOOTPRINT

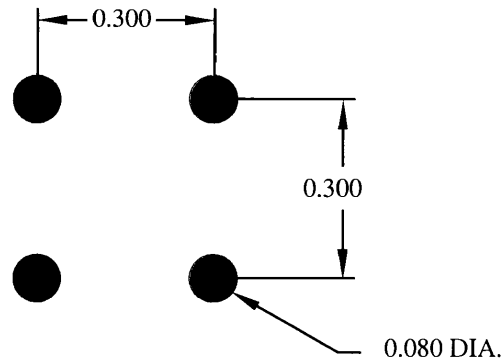

SCHEMATIC

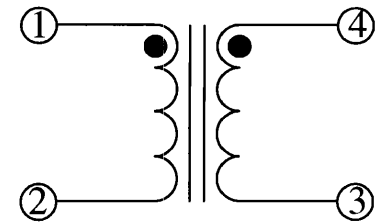

ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 12.70-19.04 $\mu$ H @ 0 ADC (1-2) (SH 1, 4) (SH 2, 3)


10 KHz 100mV


DC BIAS: 12.70uH TYP. @ 1.52 ADC (1-2) (SH 1, 4) (SH 2, 3) 10 KHz 100mV

DC RESISTANCE: 0.070 OHMS NOM. (1-2) (SH 1, 4) (SH 2, 3)


HIGH VOLTAGE TEST: 1500 VRMS (1-4)

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	TITLE:
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	INDUCTOR
A	11-26-08	CUSTOMER PRINT (Q12506)	<i>goc</i>		PART NO.
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	L11-0060

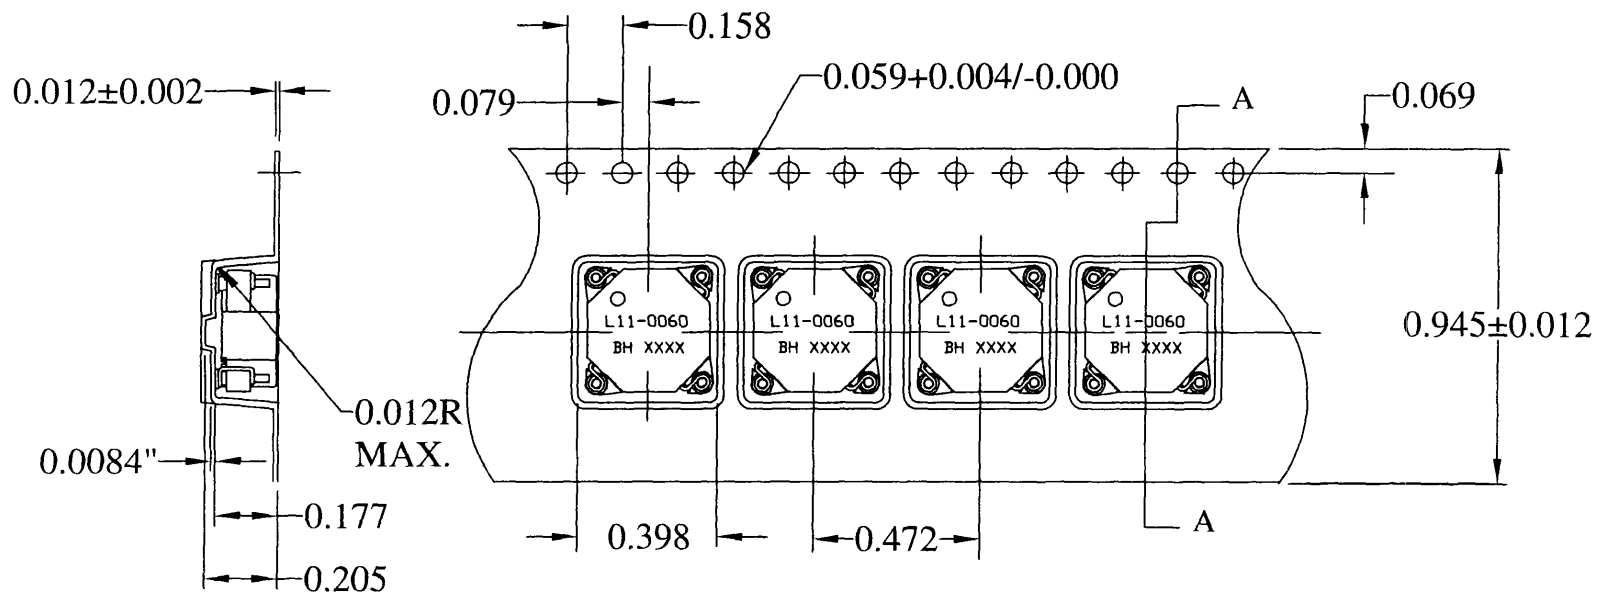

CARRIER TAPE 811-0187

				DESIGN PER:		 <b>BH ELECTRONICS, INC.</b> BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<b>BH CATALOG</b>		
				CUSTOM      NON-PROPRIETARY	<input checked="" type="checkbox"/>	
				DRAWN:      K. LOFTUS		
				ENGR:      J. DECRAMER		TITLE: <b>INDUCTOR</b>
A	11-26-08	CUSTOMER PRINT (Q12506)		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01   .XXX±.005		PART NO. <b>L11-0060</b>
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2		