

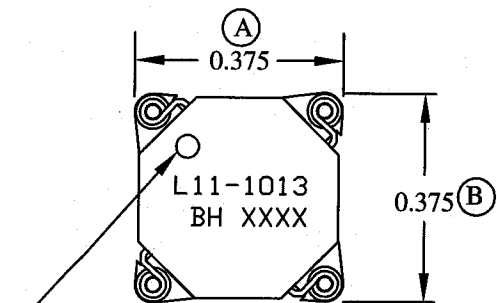



MECHANICAL

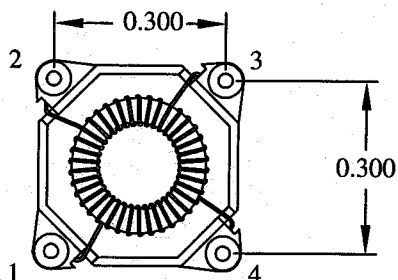


PIN 1 INDICATOR

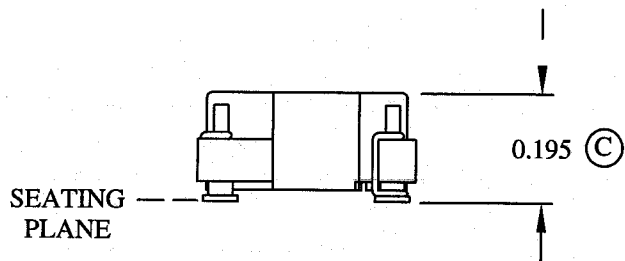

FOOTPRINT

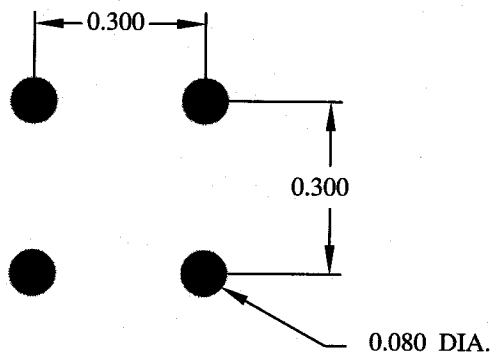

SCHEMATIC



ELECTRICAL SPECIFICATIONS

TURNS RATIO : 1:1



OPEN CIRCUIT INDUCTANCE: 8.93uH ±20% @ 0 ADC (1-2)


7.14uH TYP. @ 2.03 ADC (1,4-2,3)

DC RESISTANCE: (1-2 OR 3-4) 0.068 OHMS NOM.


IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: INDUCTOR
A	8-1-05	CUSTOMER PRINT			PART NO. L11-1013
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	

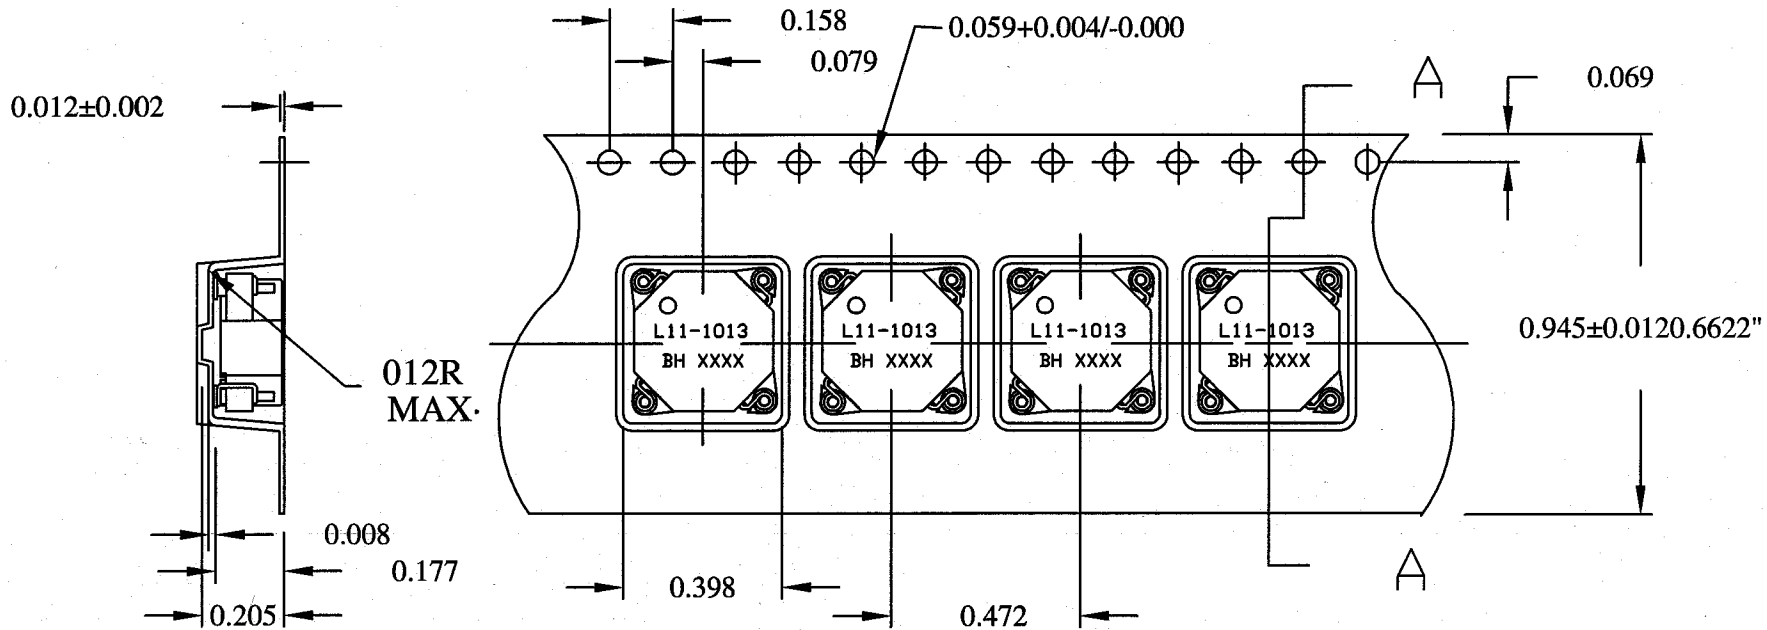

CARRIER TAPE 811-0187

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				CUSTOM NON-PROPRIETARY <input checked="" type="checkbox"/>	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: INDUCTOR
A	8-1-05	CUSTOMER PRINT	<i>JSC</i>		PART NO. L11-1013
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	