



MECHANICAL

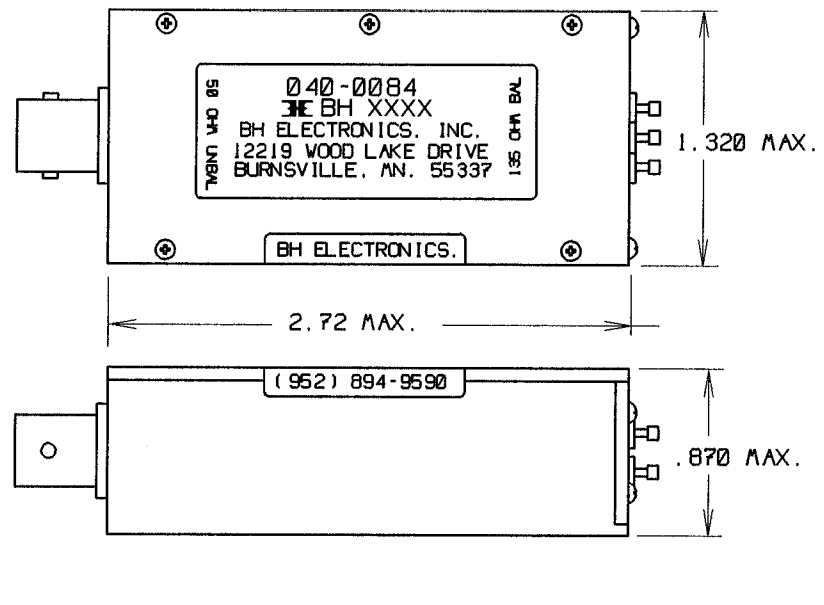

SCHEMATIC

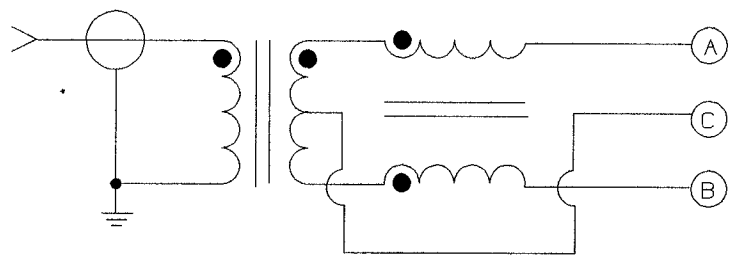

ELECTRICAL SPECIFICATIONS

- INSERTION LOSS: 1dB MAX 200Hz - 12MHz
- RETURN LOSS: (BI-DIRECTIONAL)
17.5dB MIN 200Hz - 500Hz
20dB MIN 500Hz - 12MHz
- COMMON-MODE REJECTION: 50dB MIN 200Hz - 12MHz

DESIGNED PER:	BH CATALOG
DRAWN:	K. LOFTUS
ENGR.	N. DOOSE
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES. TOLERANCES NON-CUMULATIVE.	
	.XX ± .01 .XXX ± .005
SCALE 1:	SHEET 1 / 1

BH®
BH ELECTRONICS, INC.
 BURNSVILLE & MARSHALL, MN
 ©1998 BH Electronics

TITLE
 50 : 135 OHM
 DSL TEST BALUN

PART NO.
 040-0084

A	3-21-00	CUSTOMER PRINT (Q10122-4)	<i>NDSD</i>
ISSUE	DATE	REVISIONS	