


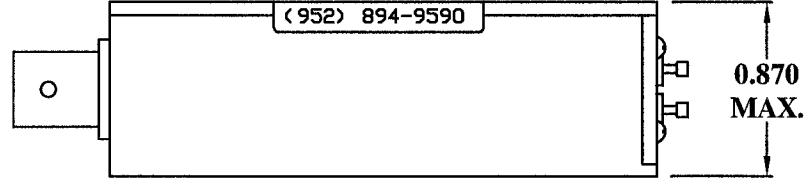


MECHANICAL

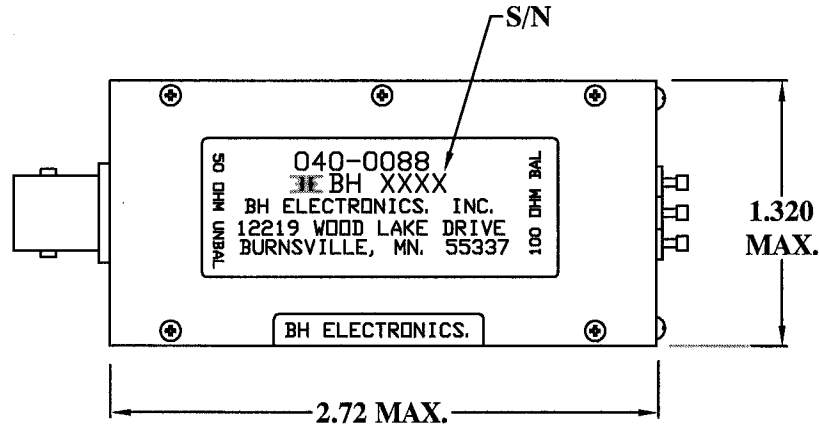

SCHEMATIC

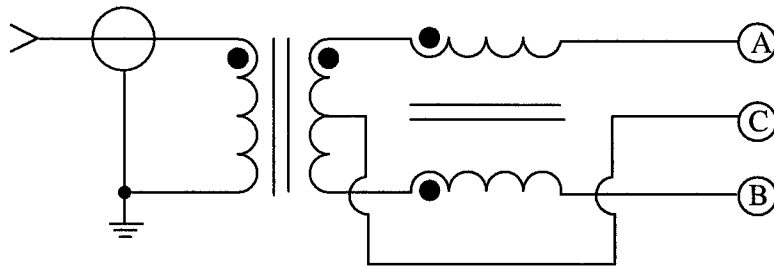


ELECTRICAL SPECIFICATIONS

INSERTION LOSS: 2dB MAX. 200Hz - 1.2 MHz  
(BACK TO BACK)

RETURN LOSS: (BI-DIRECTIONAL)  
17.5dB MIN. 200Hz - 500Hz  
20dB MIN. 500Hz - 1.2 MHz

COMMON MODE REJECTION: 50dB MIN. 200Hz - 1.2 MHz

				DESIGN PER:	BH CATALOG	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY		
				DRAWN:	K. LOFTUS	TITLE: 50:100 OHM DSL TEST BALUN PART NO. 040-0088
				ENGR:	N. DOOSE	
B	12-28-04	UPDATE TO CAD	<i>NGD</i>	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		
A	3-1-00	CUSTOMER PRINT (Q10122-6)	NGD			
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1		