



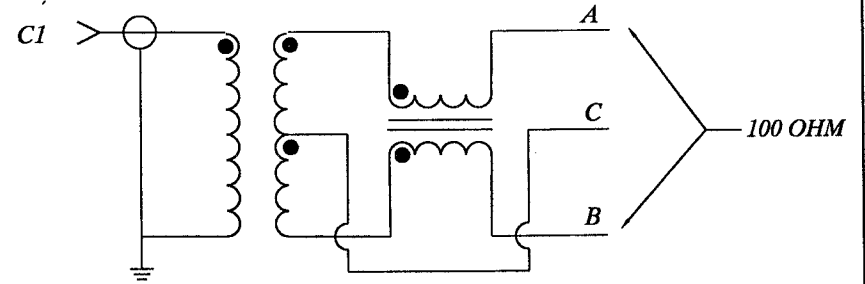

MECHANICAL

SCHEMATIC

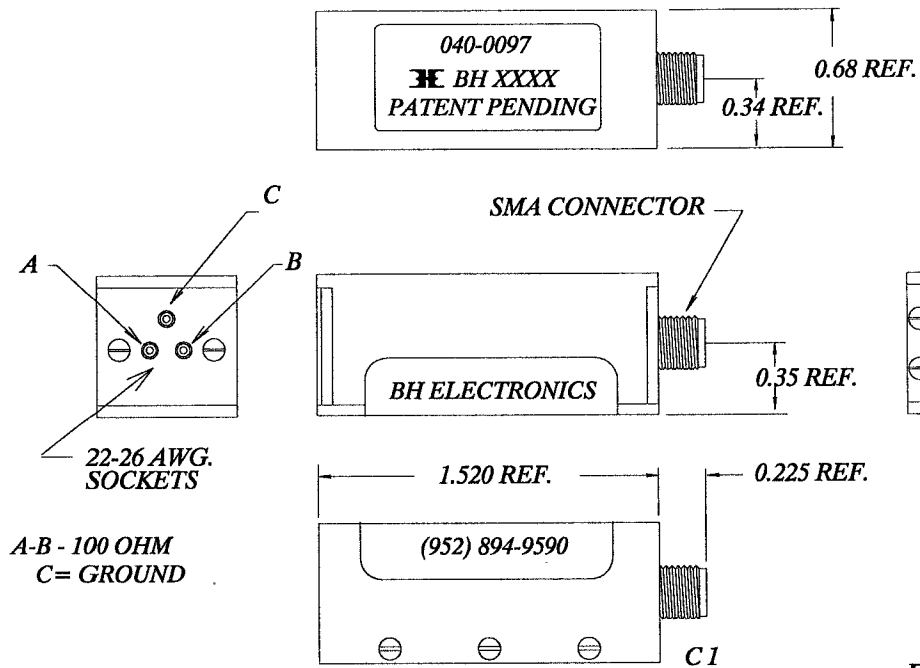

ELECTRICAL SPECIFICATIONS (25 KHz - 30 MHz)
 PRI/SEC IMPEDANCE: 50 OHMS UNBAL: 100 OHMS BAL
 INSERTION LOSS: 1.5dB Max. (2 Units Back to Back)
 RETURN LOSS (50:100): 20dB MIN.
 RETURN LOSS (100:50): 20dB MIN.
 COMMON MODE REJECTION: 50dB MIN.

				DESIGNED PER:	 BH Electronics, Inc. Burnsville & Marshall, MN © 1998 BH Electronics
				BH CATALOG	
				DRAWN Kathy Loftus	
				ENGR. N. DOOSE	
B	8-10-00	Q10496 NOW 040-0097		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE. .XX±.01 .XXX±.005	TITLE: TEST BALUN, 25 KHz - 30 MHz 50:100 OHMS IMPEDANCE MATCH
A	5-5-00	CUSTOMER PRINT (Q10496)	NGD		PART NO. 040-0097
ISSUE	DATE	REVISION	BY		