



MECHANICAL

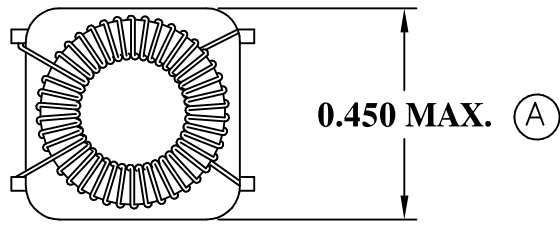

0.450 MAX. (A)

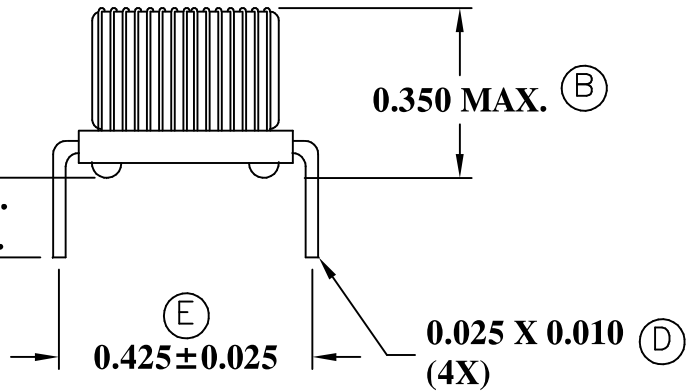


0.350 MAX. (B)

0.150 MAX.
0.125 MIN. (C)

0.425 ± 0.025 (E)


0.025 X 0.010 (4X) (D)

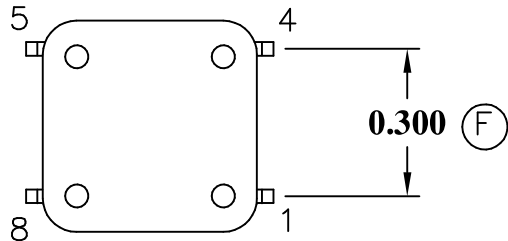

0.300 (F)

FREQUENCY MHz	NORMALIZED ATTENUATION dB'S
0.100	0.0
0.333	0.0
1.000	6.0
3.333	16.0
10.00	25.0
33.00	20.0
50.0	17.0
100.0	10.0

SCHEMATIC

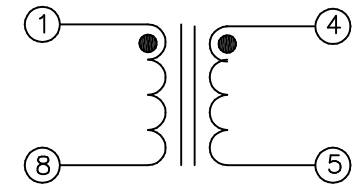

ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 33uH NOM. (1-8, 4-5)

100 KHz 20mV

INTERWINDING CAPACITANCE: 20pF MAX.

HIGH VOLTAGE TEST: 1000 VDC WINDING TO WINDING

ISSUE	DATE	REVISION	BY
M	2-8-02	REMOVE PAGE 2	JDC
L	12-1-00	REDO LOC SPEC.	JDC
K	11-27-00	UPDATE TO CAD	JDC

DESIGN PER:	
DRAWN:	K. LOFTUS
ENGR:	J. DECRAMER
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX ± .01 .XXX ± .005	
PAGE 1 OF 1	

BH® BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN
© 1998 BH Electronics

TITLE: TRANSFORMER

PART NO. 500-1164