



MECHANICAL

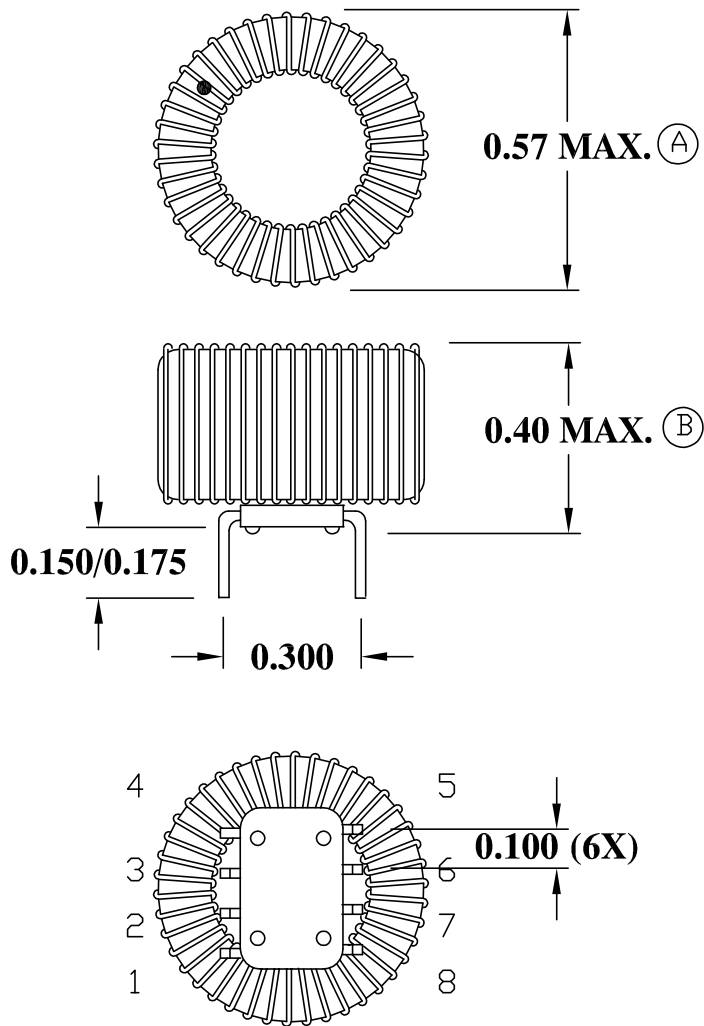

SCHEMATIC

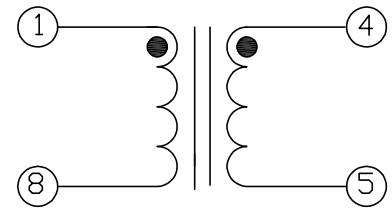

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 800mH MIN. 15 KHz 300mV


DC RESISTANCE: 15 OHMS MAX. (1-8) (4-5)

ET CONSTANT: 1200 Vμ SEC. MIN.

HIGH VOLTAGE TEST: 2200 VDC PRIMARY TO SECONDARY

F	2-13-12	NOW BH CATALOG	<i>bm</i>
E	4-30-02	ADD DIMENSION TARGETS	BM
D	5-16-94	UPDATE TO CADD	BM
C	3-11-87	CHANGE ELECTRICALS	BM
B	12-9-86	REV CHG. TO BH P/N 500-1461	BM
A	11-11-86	CUSTOMER PRINT	BM
ISSUE	DATE	REVISION	BY

DESIGN PER:	BH CATALOG
<input type="checkbox"/> CUSTOM	<input type="checkbox"/> NON-PROPRIETARY
DRAWN:	K. LOFTUS
ENGR:	B. MARKS
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
PAGE 1 OF 1	



® BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics

TITLE: RS485 DATA TRANSFORMER

PART NO. 500-1461