

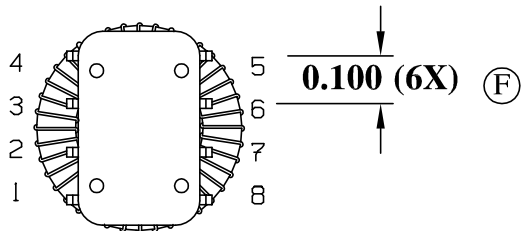
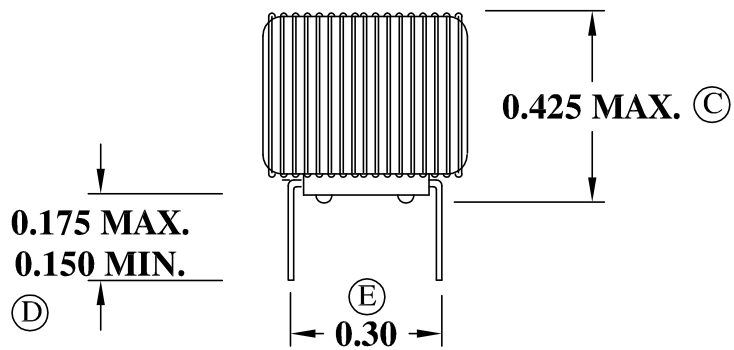


MECHANICAL

SCHEMATIC

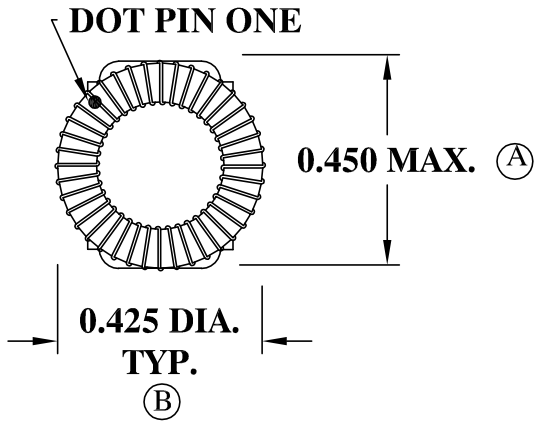

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1CT:1CT

OPEN CIRCUIT INDUCTANCE: 193mH±30%


PRIMARY LEAKAGE INDUCTANCE: 4.0μH MAX.

DC RESISTANCE: 7.5 OHMS MAX.

INTERWINDING CAPACITANCE: 450pF MAX.

HIGH VOLTAGE TEST: 1500 VRMS

ET CONSTANT: 380 Vμ SEC. MIN.

H	2-13-12	NOW BH CATALOG	<i>bm</i>	DESIGN PER: BH CATALOG	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
G	11-15-05	ECR #6643 CHG DIA. TO TYP.	BM		
F	2-10-00	ADD DIMENSION TARGETS	BM	<input type="checkbox"/> CUSTOM <input type="checkbox"/> NON-PROPRIETARY	
E	12-17-92	ECR #1507 PIN LENGTH			
D	2-1-88	ADD TURNS RATIO TO ELECT.		DRAWN: K. LOFTUS	
C	5-19-87	MECHAINCAL .375-.365 TO .425	BM	ENGR: B. MARKS	
B	5-5-87	REVISE ELECTRICAL SPECS	JVM	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: TRANSFORMER 9.6 KB/S
A	12-17-86	CUSTOMER PRINT	JVM		PART NO. 500-1465
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1	