

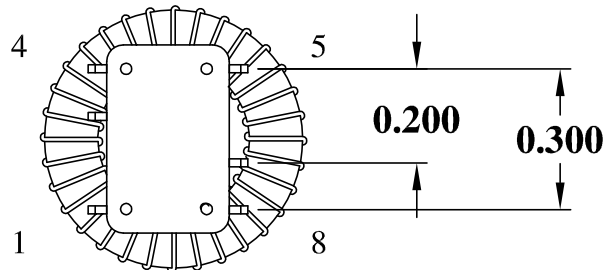
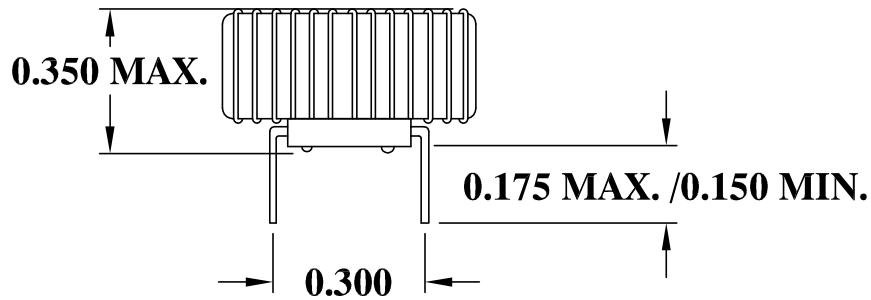


MECHANICAL

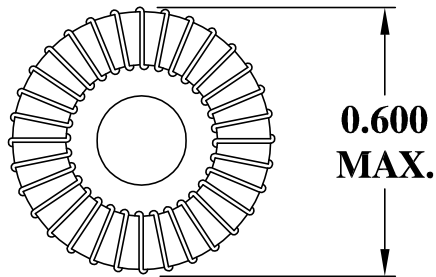

SCHEMATIC

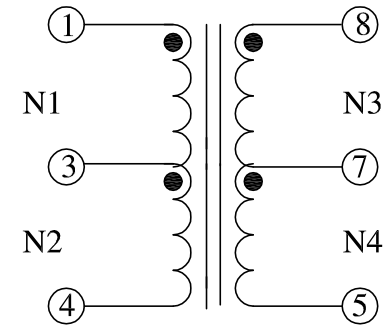

NOTE: PIN 3 FOR TERMINATION PURPOSES ONLY.

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1CT

OPEN CIRCUIT INDUCTANCE: 2.50mH±20% (1-4)  
100 KHz 300mV


PRIMARY LEAKAGE INDUCTANCE: 1.5µH MAX.

INTERWINDING CAPACITANCE: 60pF MAX.

DC RESISTANCE: 0.09 OHMS MAX. (5-8)

ET CONSTANT: 90 Vµ SEC. MIN.

HIGH VOLTAGE TEST: 1000 VRMS

ISSUE	DATE	REVISION	BY	DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
G	2-13-12	NOW BH CATALOG	<i>Bm</i>	BH CATALOG	
F	4-12-06	ECR #6844 CHG LEAD DIM.	BM	<input type="checkbox"/> CUSTOM <input type="checkbox"/> NON-PROPRIETARY	
E	4-9-04	ECR #6079 UPDATE TO CADD	BM	DRAWN: K. LOFTUS	
D	12-18-92	ECR #1510 LEAD LENGTH	BM	ENGR: B. MARKS	
C	12-16-88	Q5568-1 NOW 500-1544	JB	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
B	4-20-87	SCHEMATIC TERM, CHGS	BM		TITLE: DATA TRANSFORMER (TRANSMIT)
A	3-10-87	CUSTOMER PRINT	BM		PART NO. 500-1544
				PAGE 1 OF 1	