





MECHANICAL

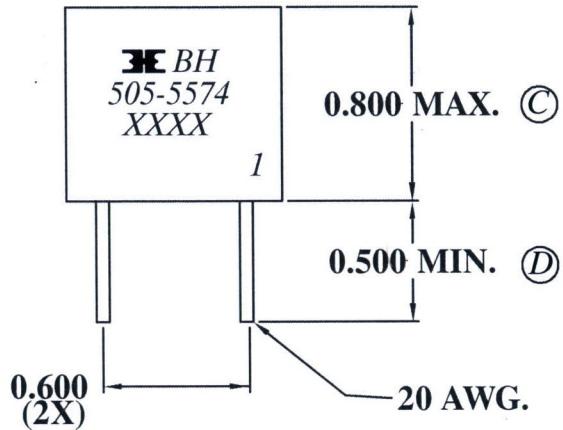

BOTTOM VIEW

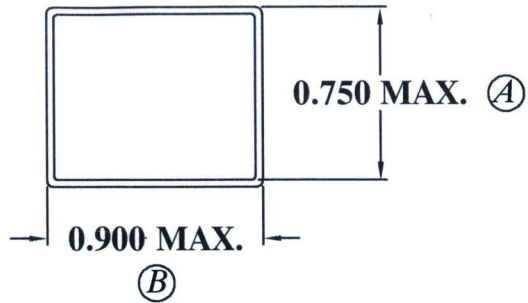

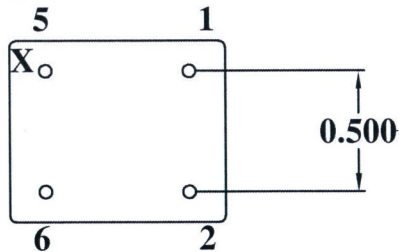

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1
OPEN CIRCUIT INDUCTANCE: 5mH MIN. (1-5) 1 KHz 100mV
PRIMARY LEAKAGE INDUCTANCE: 45uH MAX.
INTERWINDING CAPACITANCE: 50pF MAX. (1-2)
 120 KHz 50mVAC
DC RESISTANCE: 3 OHMS MAX.
HIGH VOLTAGE TEST: 2500 VRMS @ 60Hz
ET CONSTANT: 180 Vu SEC. MIN.

NOTE: "X" ON BOTTOM OF CASE INDICATES PIN 5.

				DESIGNED PER: BH CATALOG	 ® BH Electronics, Inc. Burnsville & Marshall, MN © 1998 BH Electronics
				DRAWN Kathy Loftus	
				ENGR. J. DECRAMER	TITLE: SCR TRIGGER TRANSFORMER
B	4-25-19	REVISE ELECTRICALS		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE. .XX±.01 .XXX±.005	PART NO. 505-5574
A	4-13-00	CUSTOMER PRINT	JDC		
ISSUE	DATE	REVISION	BY		