

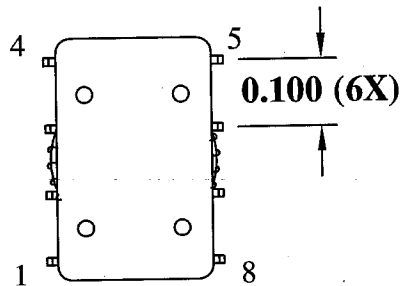
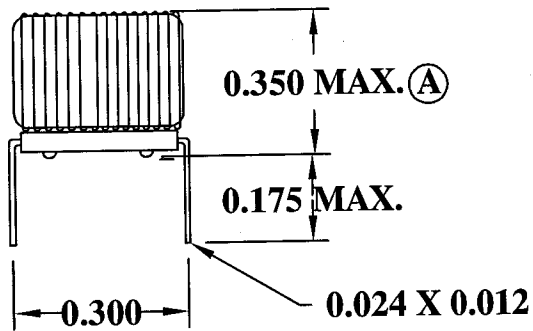


MECHANICAL

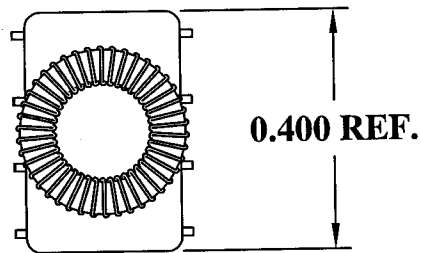

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 21mH MIN. 10 KHz 300mV

PRIMARY LEAKAGE INDUCTANCE: 2μH MAX.


INTERWINDING CAPACITANCE: 100pF MAX.

DC RESISTANCE: 2 OHMS MAX.

HIGH VOLTAGE TEST: 1500 VAC/1 SEC.

ET CONSTANT: 100Vμ SEC. MIN.

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: B. MARKS	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: TRANSFORMER
					PART NO. L00-1455
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1	
A	10-11-05	CUSTOMER PRINT	goc		