

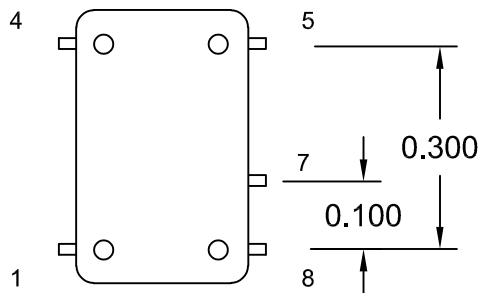
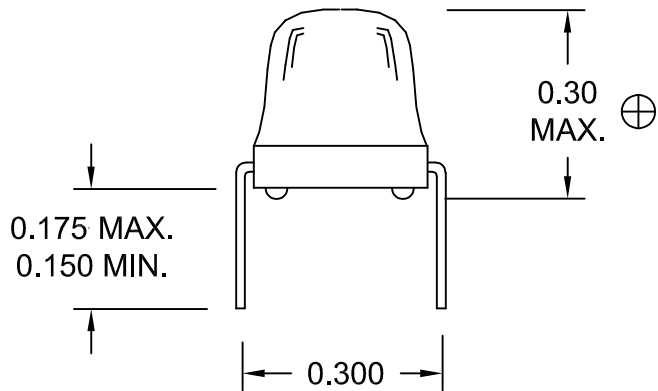


MECHANICAL

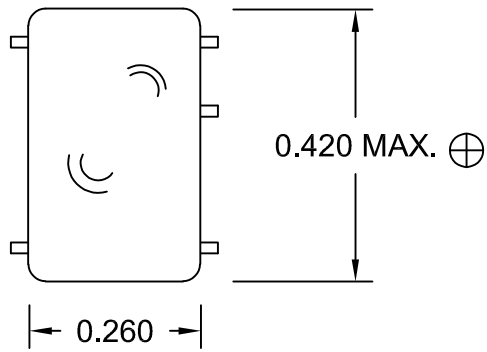

SCHEMATIC

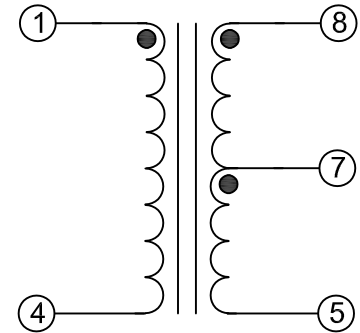

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1CT

OPEN CIRCUIT INDUCTANCE: 2.2mH±20% 100 KHz 300mV

PRIMARY LEAKAGE INDUCTANCE: 1.0µH MAX.

INTERWINDING CAPACITANCE: 60pF MAX.

ET CONSTANT: 25Vµ SEC. MIN.

HIGH VOLTAGE TEST: 1000 VRMS

RoHS Compliant

DESIGN PER:

BH CATALOG

CUSTOM NON-PROPRIETARY

DRAWN: K. LOFTUS

ENGR: B. MARKS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS IN INCHES, TOLERANCES
NON-CUMULATIVE
.XX±.01 .XXX±.005

PAGE 1 OF 1



BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics

TITLE: DATA TRANSFORMER
(RECEIVE)

PART NO. L00-1488

ISSUE	DATE	REVISION	BY
D	2-1-21	REVERT TO BH CATALOG	<i>[Signature]</i>
C	4-2-12	REVISE TO CUSTOMER	BAM
B	2-10-09	ECR #8054 LENGTH & HEIGHT MAX.	JDC
A	10-11-05	CUSTOMER PRINT	JDC