



**MECHANICAL**

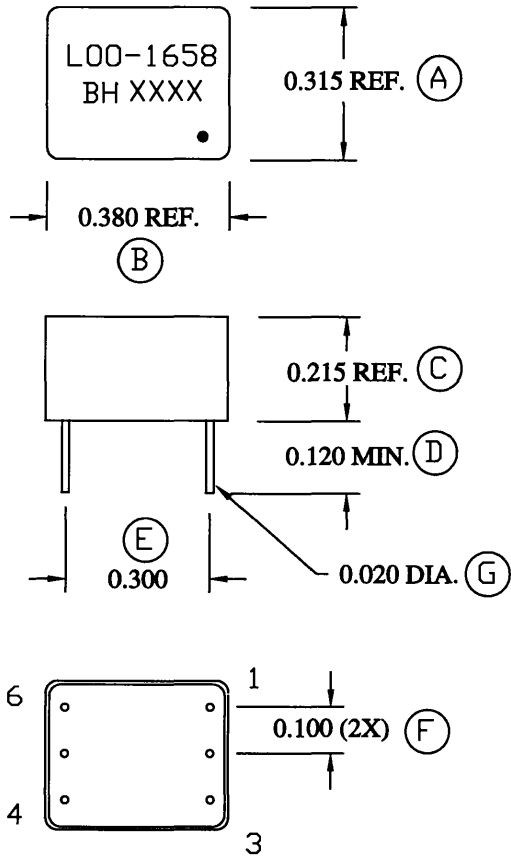

**SCHEMATIC**

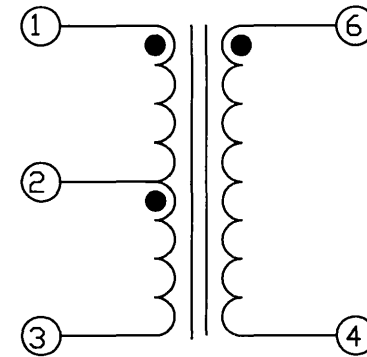

**ELECTRICAL SPECIFICATIONS**

**TURNS RATIO: 1:1CT**


**OPEN CIRCUIT INDUCTANCE: 500μH MIN. (1-3) 100 KHz 100mV**

**DC RESISTANCE: 2 OHMS MAX. (1-3)**

**ET CONSTANT: 30 Vμ SEC. MIN. (BIPOLAR)**

**HIGH VOLTAGE TEST: 3750 VRMS / 1 SEC.**

**(RoHS COMPLIANT)**

				DESIGN PER:	 <b>BH ELECTRONICS, INC.</b> BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<b>BH CATALOG</b>	
				<input type="checkbox"/> CUSTOM <input type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS ENGR: T. GOODRICH	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005 PAGE 1 OF 1	<b>TITLE:</b> <b>TRANSFORMER</b>
A	3-7-12	CUSTOMER PRINT	<i>[Signature]</i>		<b>PART NO.</b> <b>L00-1658</b>
ISSUE	DATE	REVISION	BY		