



MECHANICAL

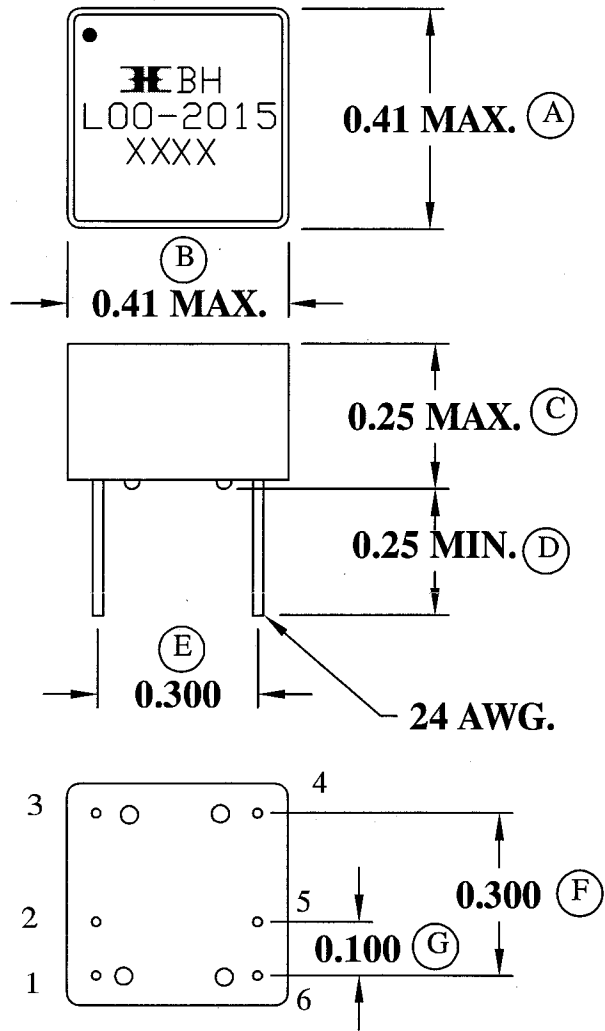

SCHEMATIC



ELECTRICAL SPECIFICATIONS

URNS RATIO: 1CT:1.3CT

OPEN CIRCUIT INDUCTANCE: 400uH MIN. (1-3) 100 KHz 20mV

PRIMARY LEAKAGE INDUCTANCE: 22uH MAX. (1-3 SH 4, 6)

120 KHz 50mV



DC RESISTANCE: (1-3) 1 OHM MAX.

(6-4) 1.1 OHM MAX.

HIGH VOLTAGE TEST: 1500 VRMS FOR 1 SEC.

ET CONSTANT: 18.3 Vus

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG +5V TO +5V	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	TITLE: ISOLATION TRANSFORMER
A	10-4-05	CUSTOMER PRINT		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	PART NO. L00-2015
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1	