

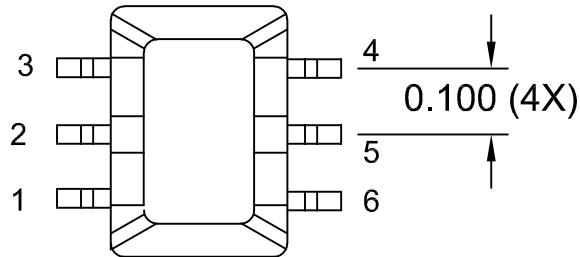
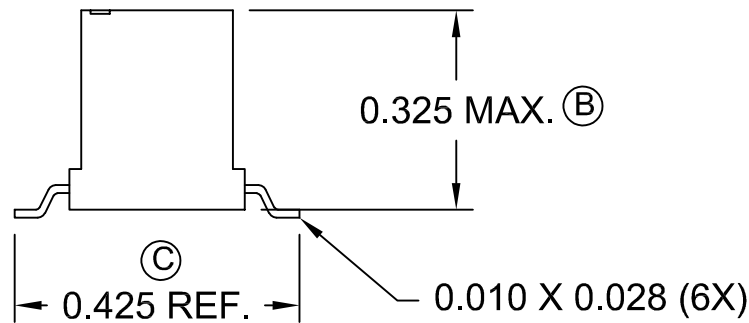



MECHANICAL

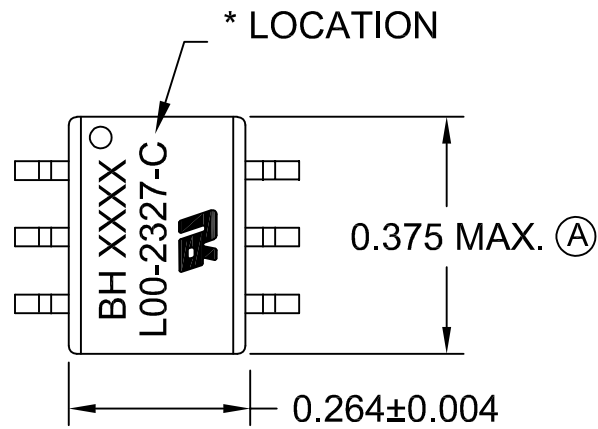

SUGGESTED PAD LAYOUT

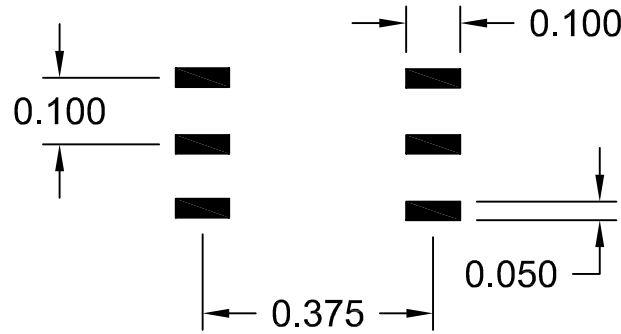

SCHEMATIC

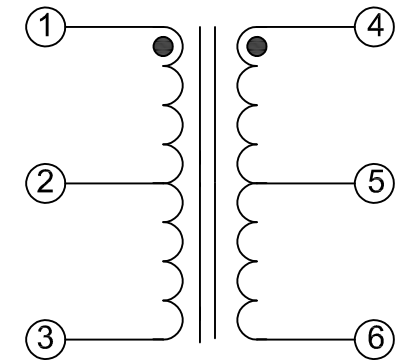

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1CT:1.3CT

OPEN CIRCUIT INDUCTANCE: 400µH MIN. (1-3) 10 KHz 100mV

PRIMARY LEAKAGE INDUCTANCE: 25µH MAX. (1-3 SH 4-6)

INTERWINDING CAPACITANCE: 10pF MAX. (1-3 TO 4-6)

DC RESISTANCE: 0.6 OHMS NOM. (1-3) (4-6)

HIGH VOLTAGE TEST: 3000 VRMS / 1 SEC. (1-6)

ET CONSTANT: 18 Vµ SEC. (BIPOLAR)


HAND SOLDER ONLY.



\* LOCATION  
MARSHALL - L00-2327  
CHINA - L00-2327-C  
MEXICO - L00-2327-A

RoHS Compliant

ISSUE	DATE	REVISION	BY
F	10-28-19	UPDATE SOLDERING INFO	msd
E	2-13-12	REVISE * LOCATION	BM
D	7-15-10	ADD PAGE 2	BM
C	6-24-10	REVISE LABEL	BM
B	11-2-05	RoHS COMPLIANT	BM
A	8-17-05	CUSTOMER PRINT	BM

DESIGN PER:	BH CATALOG
DRAWN:	K. LOFTUS
ENGR:	B. MARKS
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
PAGE 1 OF 2	

 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics	TITLE:	TRANSFORMER
	PART NO.	L00-2327

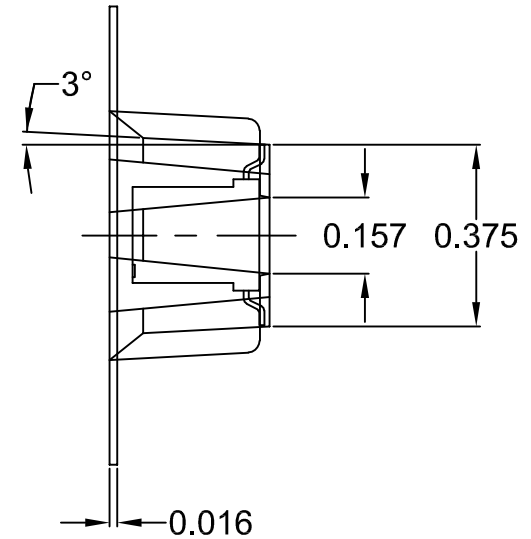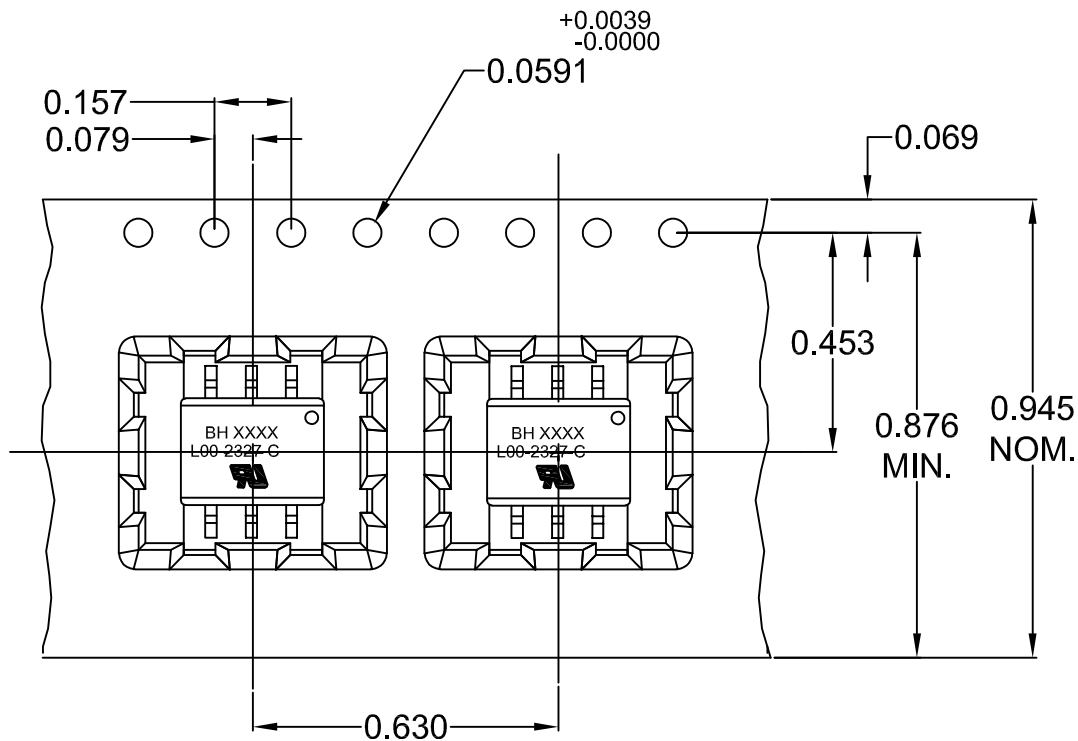

- NOTE: 1. MATERIAL: CPS-101,0.41-MM THICK  
 2. WIDTH (MM) 24  
 3. PITCH (MM): 16  
 4. POCKETS/M: 62.5  
 5. METERS/REEL: 27  
 6. POCKETS/REEL: 1687

811-0315

RoHS Compliant

DESIGN PER:

BH CATALOG

DRAWN: K. LOFTUS

ENGR: B. MARKS

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS IN INCHES, TOLERANCES  
 NON-CUMULATIVE  
 .XX±.01 .XXX±.005

PAGE 2 OF 2



BH ELECTRONICS, INC.  
 BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics

TITLE:

TRANSFORMER

PART NO.

L00-2327

ISSUE	DATE	REVISION	BY
F	10-28-19	UPDATE SOLDERING INFO	<i>nyd</i>
E	2-13-12	REVISE * LOCATION	BM
D	7-15-10	ADD PAGE 2	BM
C	6-24-10	REVISE LABEL	BM
B	11-2-05	RoHS COMPLIANT	BM
A	8-17-05	CUSTOMER PRINT	BM