

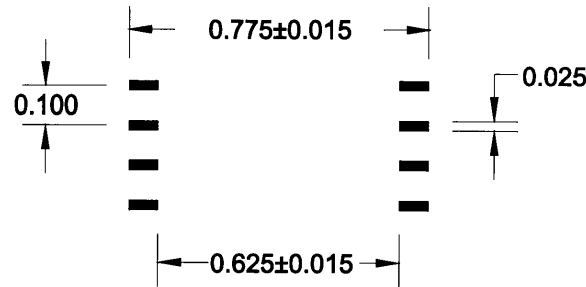
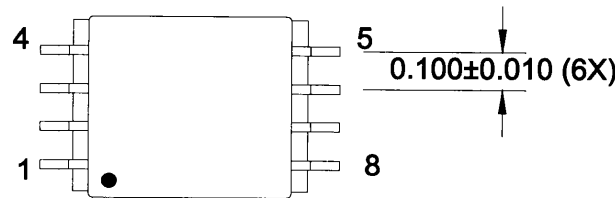
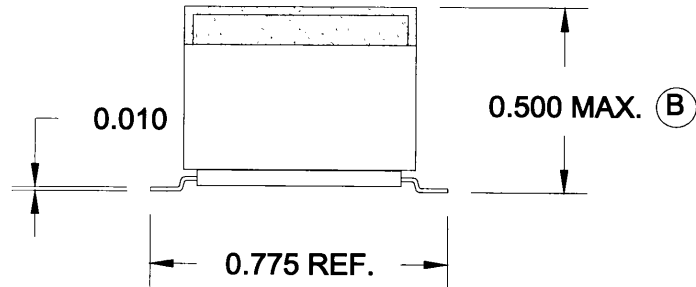


MECHANICAL

(FOOTPRINT)

SCHEMATIC

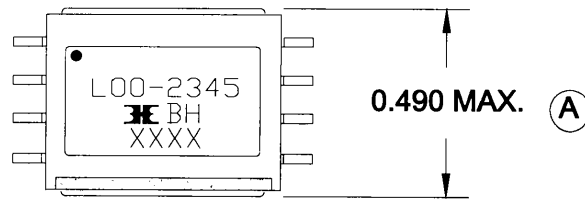

ELECTRICAL SPECIFICATIONS

URNS RATIO: 4:4:5:5

OPEN CIRCUIT INDUCTANCE: 400uH MIN. (1-4) 100 KHz @ 20mV

PRIMARY LEAKAGE INDUCTANCE: 1.17uH NOM. (1-4 SHORT 5-8)
100 KHz @ 50mV

INTERWINDING CAPACITANCE: 2.5pF NOM. (1-8) 100 KHz @ 50mV

DC RESISTANCE: (1-4) 0.25 OHMS NOM.
(8-5) 0.38 OHMS NOM.

HIGH VOLTAGE TEST: 4000 VRMS (1-8)


ET CONSTANT: 18Vu SEC. MIN.

TERMINAL: ALLOY 42 WITH 100% MATTE TIN PLATING

UL 2601 CONSTRUCTION (FILE EI47744)

⊕ COPLANARITY
TM0070

RoHS Compliant

				DESIGN PER:	BH CATALOG		 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics	
				CUSTOM	NON-PROPRIETARY	X		
D	9-19-08	ADD PLATING INFORMATION	<i>Bm</i>	DRAWN:	K. LOFTUS			
C	7-17-06	ECR #7000 0.490 MAX. WIDTH		ENGR:	B. MARKS			
B	5-3-06	ECR #6879 ADD PIN 1 DOT	BM	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005			TITLE:	TRANSFORMER
A	9-13-05	CUSTOMER PRINT	BM				PART NO.	L00-2345
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1				