

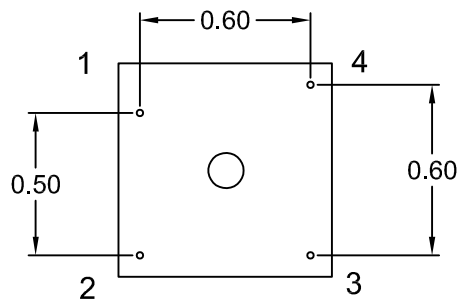
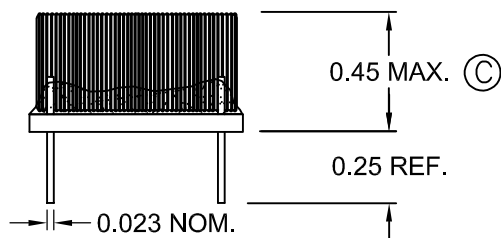


MECHANICAL

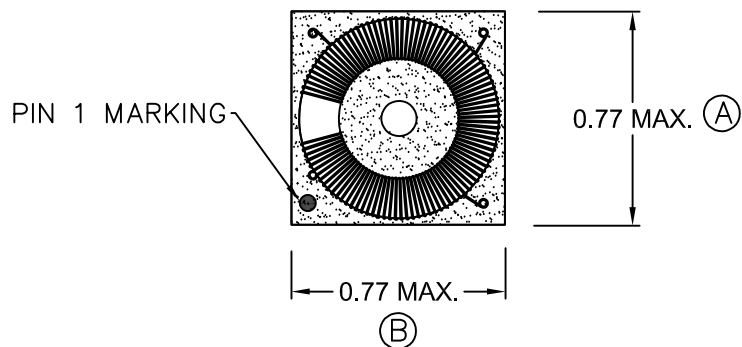

SCHEMATIC



ELECTRICAL SPECIFICATIONS

TURNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 100mH MIN. (1-2) (4-3) 100 Hz 100mV


DC RESISTANCE: 2.80 OHMS MAX. (1-2) (4-3)

HIGH VOLTAGE TEST: 2500 VAC / 1 SEC. (1-4)

INSERTION LOSS: <3dB 30Hz - 10 MHz

OPERATING TEMPERATURE RANGE -40°C TO +120°C

RoHS COMPLIANT

				DESIGN PER:	BH CATALOG		 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics	
				<input type="checkbox"/> CUSTOM	NON-PROPRIETARY <input checked="" type="checkbox"/>			
				DRAWN:	K. LOFTUS			
				ENGR:	B. GASS			
C	5-21-18	UPDATE DCR		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005			TITLE:	TRANSFORMER
B	8-19-14	ADDED PIN DIAMETER	BG				PART NO.	L00-3094
A	7-24-13	CUSTOMER PRINT						
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1				