



MECHANICAL

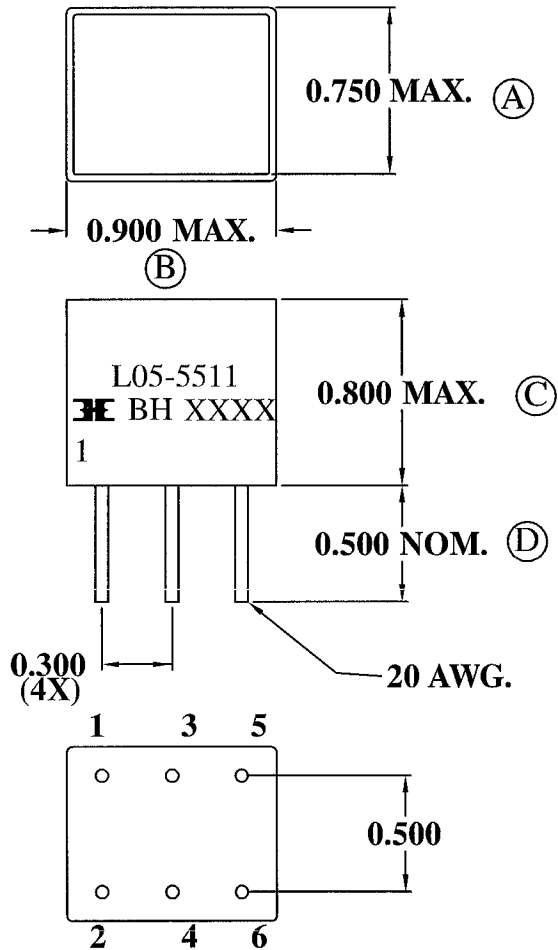


SCHEMATIC

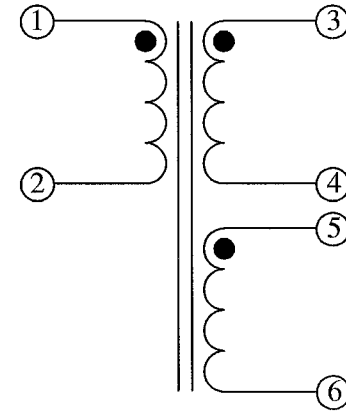

ELECTRICAL SPECIFICATIONS

TURNS RATIO: 2:1:1  
 OPEN CIRCUIT INDUCTANCE: 5.0mH MIN. (1-2) 1 KHz 100mV  
 PRIMARY LEAKAGE INDUCTANCE: 60uH MAX. (1-2 SHORT 3-4, 5-6)  
 INTERWINDING CAPACITANCE: 30pF MAX. (1-2 TO 3-4) (1-2 TO 5-6)  
 HIGH VOLTAGE TEST: 2500 VRMS/ 1SEC. (1 TO 3, 5) (3-5)  
 ET CONSTANT: 180 Vu SEC. MIN.

				DESIGNED PER:	 <b>BH Electronics, Inc.</b> Burnsville & Marshall, MN © 1998 BH Electronics
				<b>BH CATALOG</b> <input type="checkbox"/> CUSTOM <input type="checkbox"/> NON-PROPRIETARY <input checked="" type="checkbox"/>	
				DRAWN Kathy Loftus	TITLE:
				ENGR. J. DECRAMER	<b>SCR TRIGGER TRANSFORMER</b>
A	4-17-06	CUSTOMER PRINT	<i>[Signature]</i>	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE. .XX±.01 .XXX±.005	PART NO.
ISSUE	DATE	REVISION	BY		<b>L05-5511</b>