




MECHANICAL

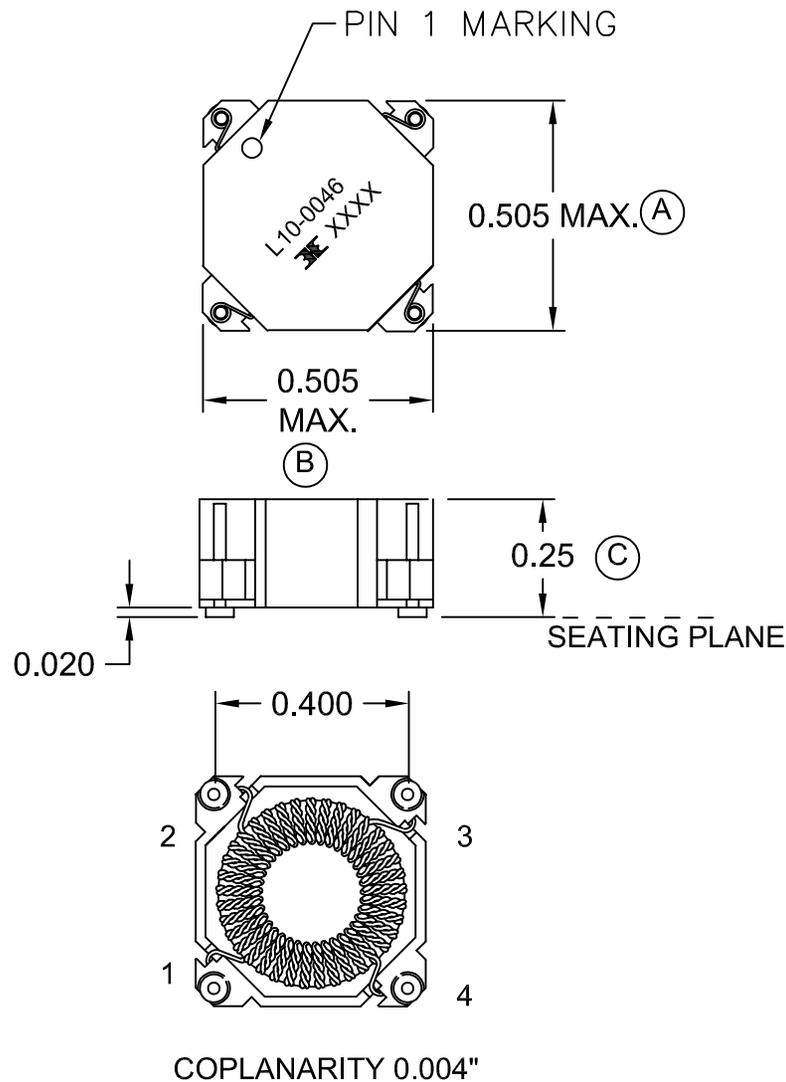

RECOMMENDED PCB LAYOUT

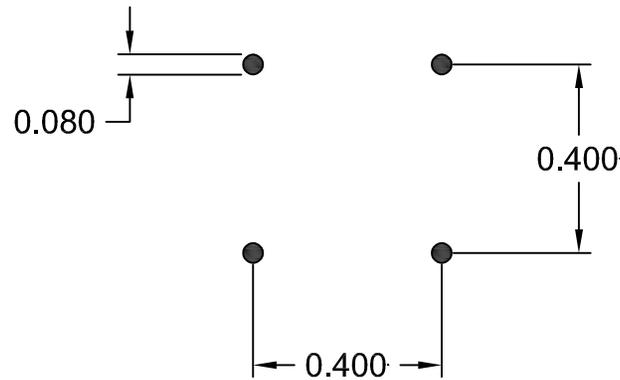

SCHEMATIC

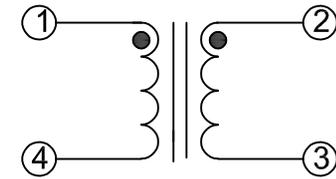

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 75.6mH MIN. @ 0 ADC (1-4) 10 KHz 100mV

PRIMARY LEAKAGE INDUCTANCE: 825nH NOM. (1-4 SH 2, 3)  
120 KHz 50mV

INTERWINDING CAPACITANCE: 250pF NOM. (1-2) 120 KHz 50mV

DC RESISTANCE: 3.75 OHMS NOM. (1-4) (2-3)

IR: 5K MEGOHMS MIN. @ 200 VDC (1-2)

RoHS Compliant

DESIGN PER:

BH CATALOG

CUSTOM

NON-PROPRIETARY

DRAWN:

KALANI SA

ENGR:

B. GASS

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS IN INCHES, TOLERANCES  
NON-CUMULATIVE  
.XX±.01 .XXX±.005

PAGE 1 OF 2



BH ELECTRONICS, INC.  
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics



TITLE:

CHOKE

PART NO.

L10-0046

A	5-15-14	CUSTOMER PRINT (Q12909-1)	BG
ISSUE	DATE	REVISION	BY

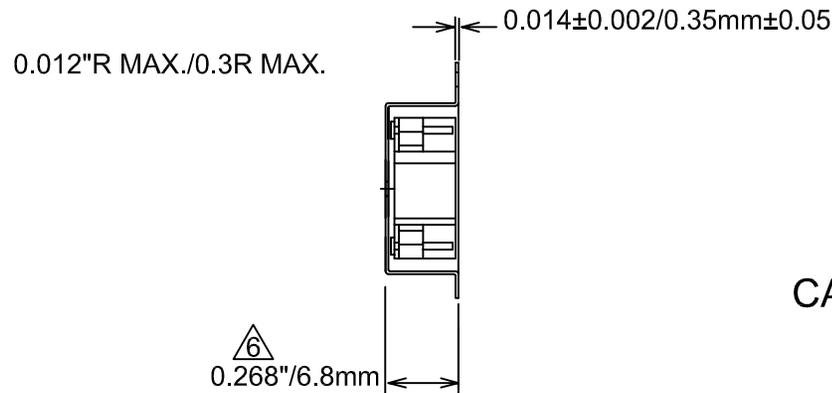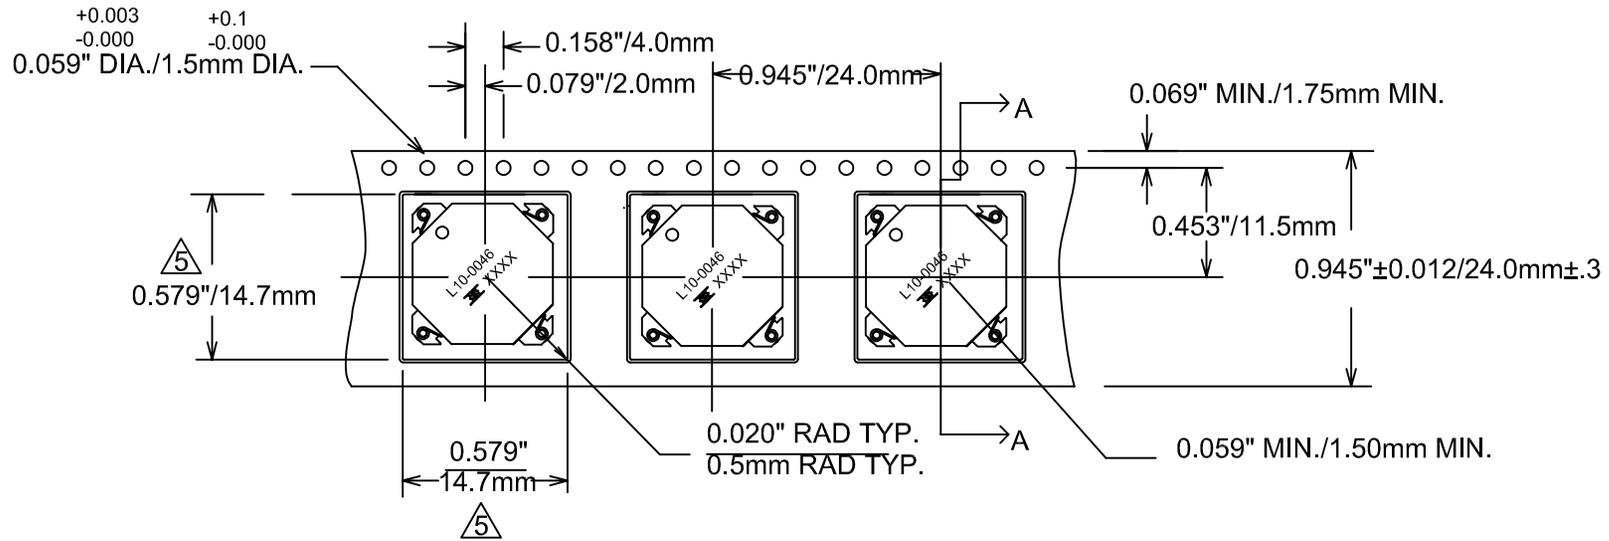

CARRIER TAPE 811-0137

SECTION A-A

A	5-15-14	CUSTOMER PRINT(Q12909-1)	BQ
ISSUE	DATE	REVISION	BY

DESIGN PER:  
**BH CATALOG**

CUSTOM       NON-PROPRIETARY

DRAWN:      KALANI SA

ENGR:      B. GASS

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS IN INCHES, TOLERANCES  
 NON-CUMULATIVE  
 .XX±.01   .XXX±.005

PAGE 2 OF 2



**BH**® **ELECTRONICS, INC.**  
 BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics

TITLE:      **CHOKER**

PART NO.      **L10-0046**