

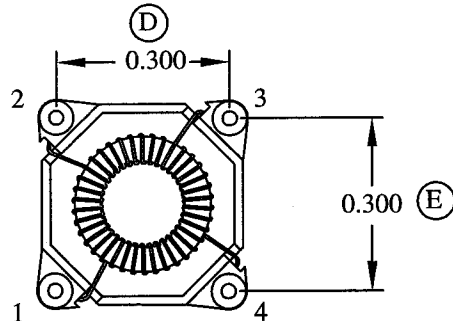
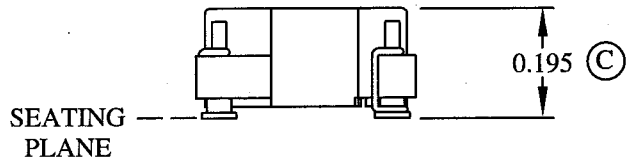



MECHANICAL

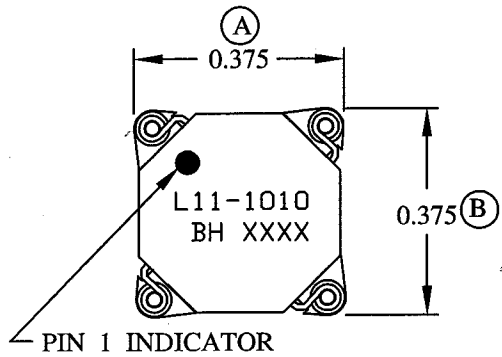

FOOTPRINT

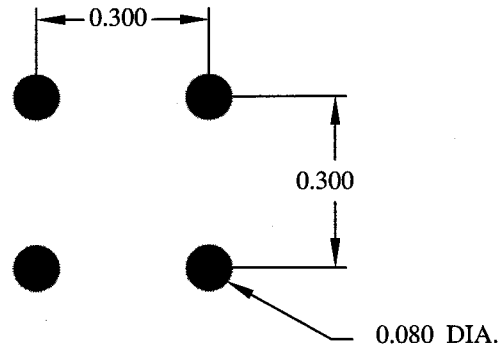

SCHEMATIC

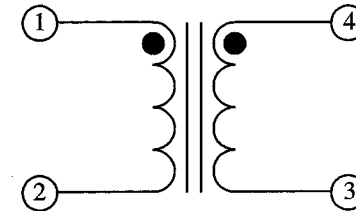

ELECTRICAL SPECIFICATIONS


OPEN CIRCUIT INDUCTANCE: 1.79 μ H - 2.67 μ H @ 0 ADC (1-2)
10 KHz 100mV


DC BIAS: 1.79 μ H TYP. @ 4.05 ADC (1-2) 10 KHz 100mV

DC RESISTANCE: (1-2 OR 3-4) 0.0135 OHMS NOM.


IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX \pm .01 .XXX \pm .005	TITLE: INDUCTOR
A	7-5-05	CUSTOMER PRINT	<i>JOL</i>		PART NO. L11-1010
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	

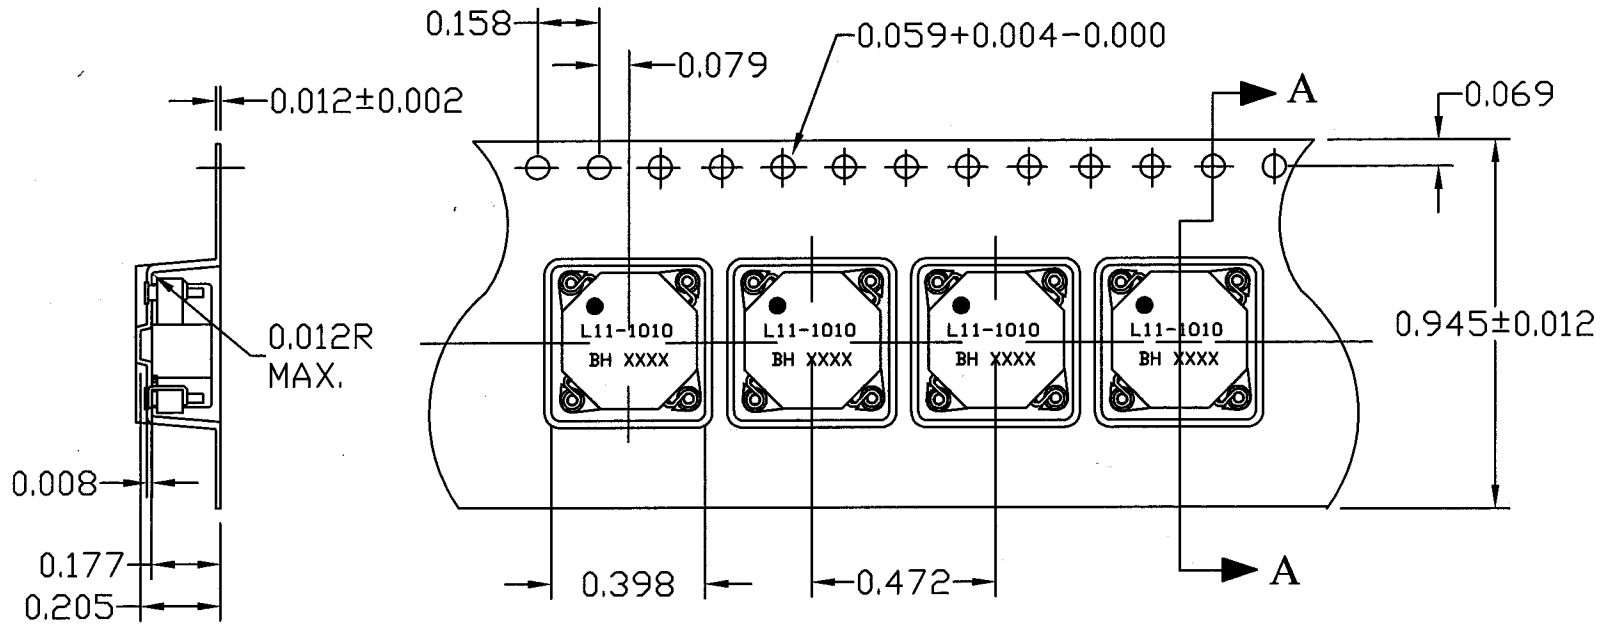

811-0187

				DESIGN PER:	 BH ® BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
A	7-5-05	CUSTOMER PRINT	<i>JL</i>		TITLE: INDUCTOR
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	PART NO. L11-1010