




MECHANICAL

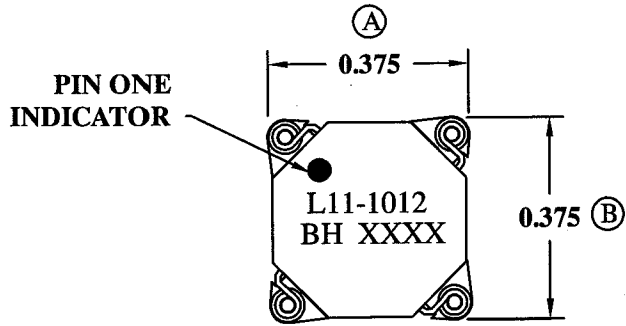


SEATING PLANE

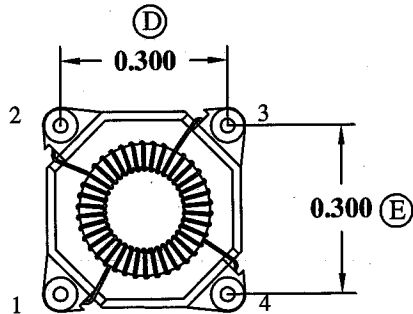


COPLANARITY TM0070

SUGGESTED PAD LAYOUT

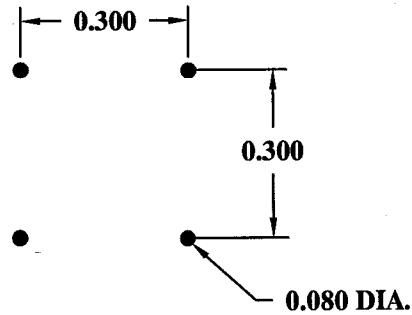

SCHEMATIC



ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 4.96-7.44 $\mu$ H (1-2)

10 KHz 100mV



DC BIAS: 4.96 $\mu$ H TYP. @ 2.43 ADC (1-2)


10 KHz 100mV

DC RESISTANCE: 0.046 OHMS NOM. (1-2) OR (3-4)


IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	BH CATALOG	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<input type="checkbox"/> CUSTOM	<input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN:	K. LOFTUS	TITLE: INDUCTOR
				ENGR:	J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		PART NO. L11-1012
A	6-15-05	CUSTOMER PRINT		PAGE 1 OF 2		
ISSUE	DATE	REVISION	BY			

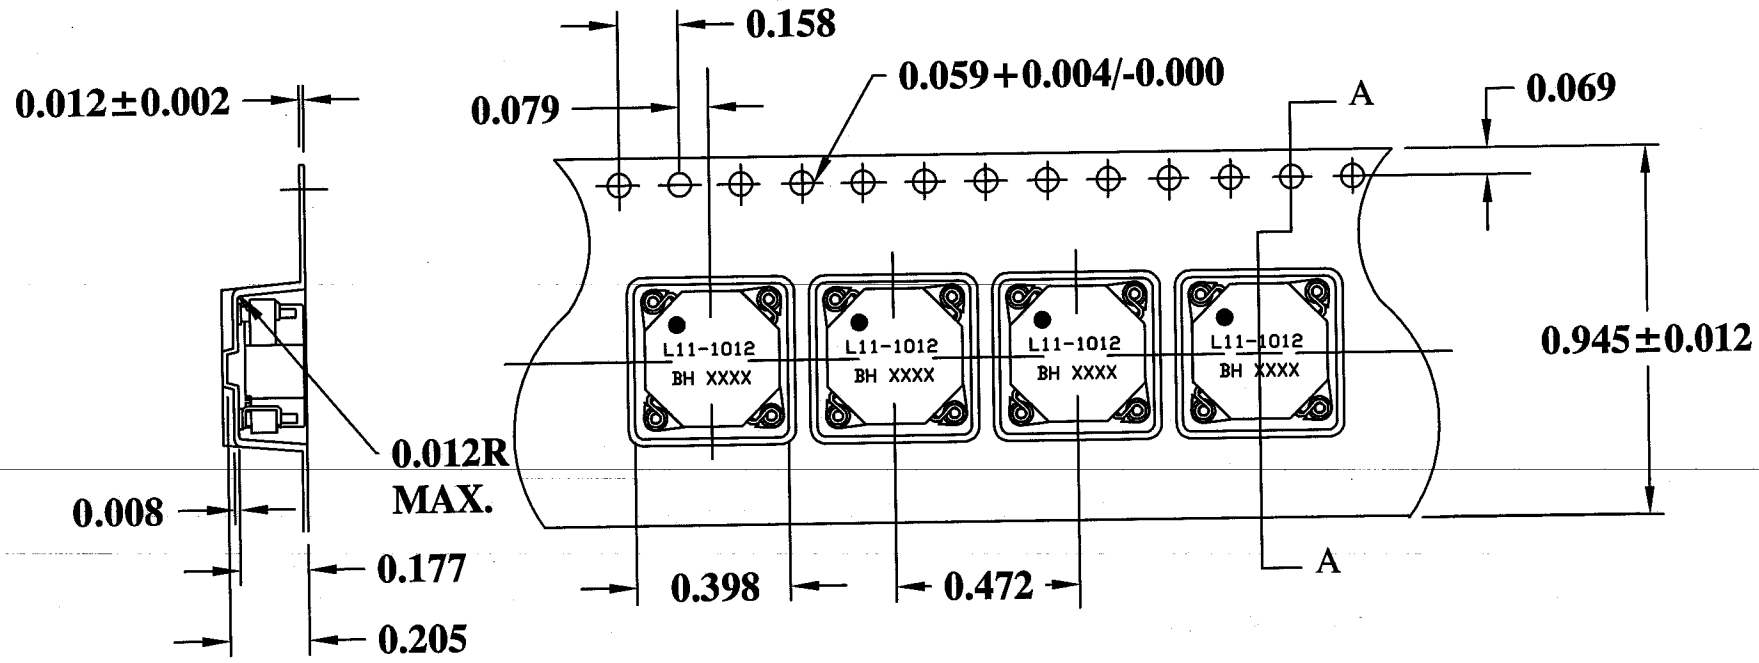

CARRIER TAPE 811-0187

				DESIGN PER: <b>BH CATALOG</b>	 <b>BH ELECTRONICS, INC.</b> BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN:      K. LOFTUS	TITLE: <b>INDUCTOR</b>
				ENGR:      J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01    .XXX±.005	PART NO. <b>L11-1012</b>
A	6-15-05	CUSTOMER PRINT	<i>JK</i>	PAGE 2 OF 2	
ISSUE	DATE	REVISION	BY		