



MECHANICAL

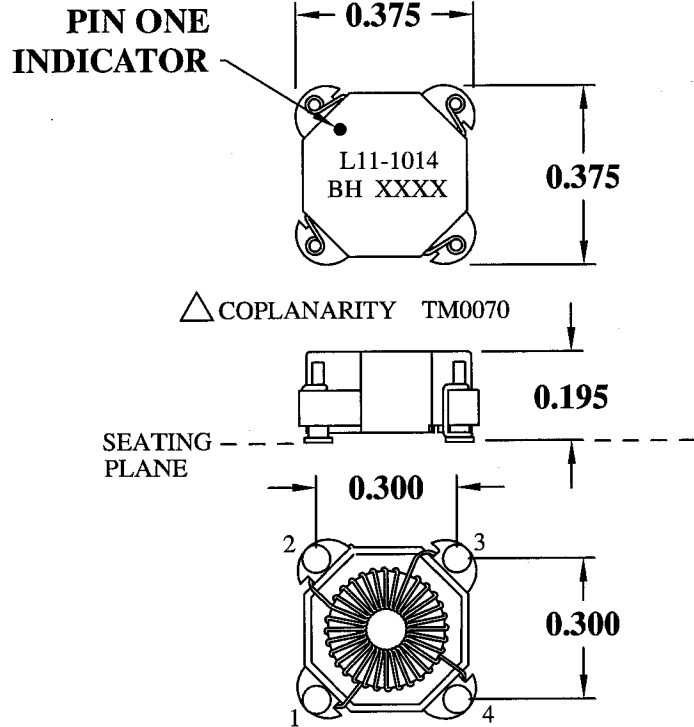


△ COPLANARITY TM0070

SUGGESTED PAD LAYOUT

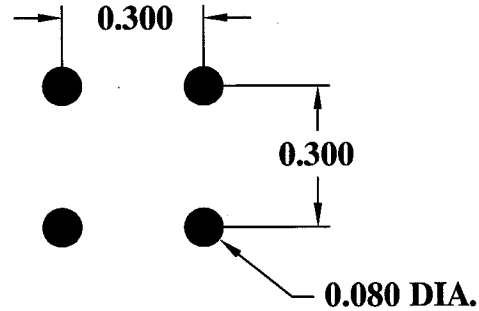

SCHEMATIC



ELECTRICAL SPECIFICATIONS

OPEN CIRCUIT INDUCTANCE: 9.72 μ H - 14.58 μ H @ 0 ADC (1-2)



10 KHz 100mV


DC BIAS: 9.72 μ H NOM. @ 1.74 ADC 10 KHz 100mV

DC RESISTANCE: 0.0992 OHMS NOM. (1-2) OR (3-4)


IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	BH CATALOG	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY		
				DRAWN:	K. LOFTUS	TITLE: INDUCTOR
				ENGR:	J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		PART NO. L11-1014
A	8-24-05	CUSTOMER PRINT				
ISSUE	DATE	REVISION	BY			

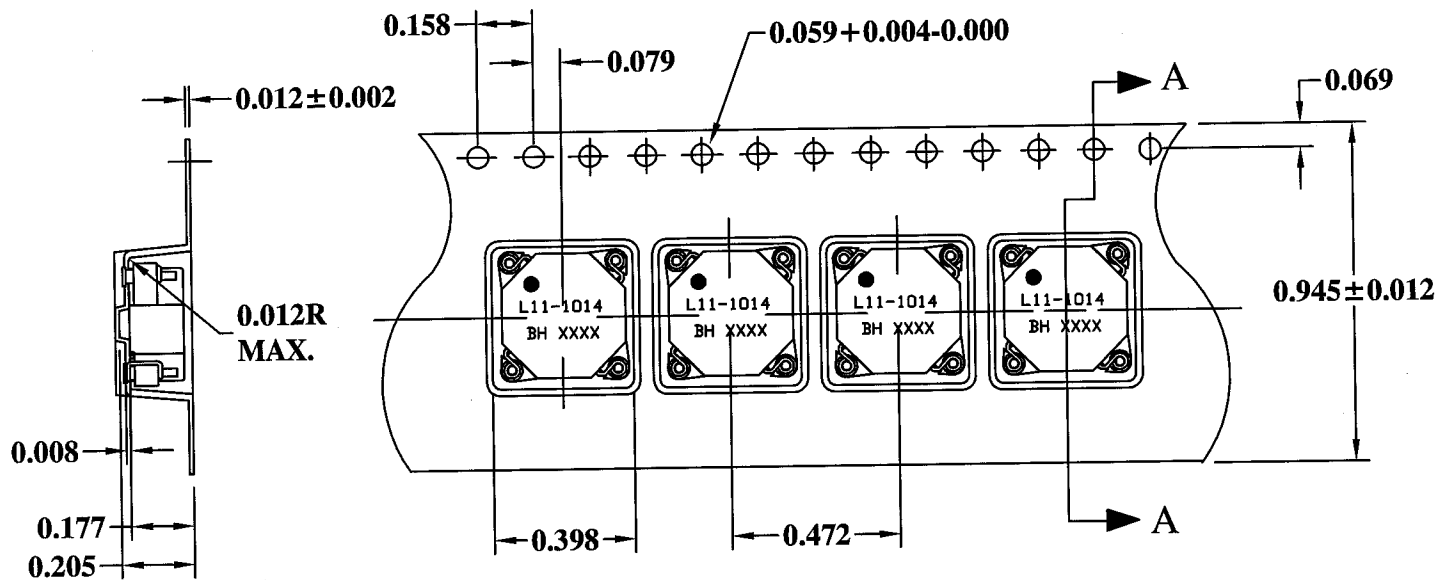

811-0187

				DESIGN PER:	BH CATALOG	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<input type="checkbox"/> CUSTOM	NON-PROPRIETARY <input checked="" type="checkbox"/>	
				DRAWN:	K. LOFTUS	TITLE: INDUCTOR
				ENGR:	J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		PART NO. L11-1014
A	8-24-05	CUSTOMER PRINT		PAGE 2 OF 2		
ISSUE	DATE	REVISION	BY			