

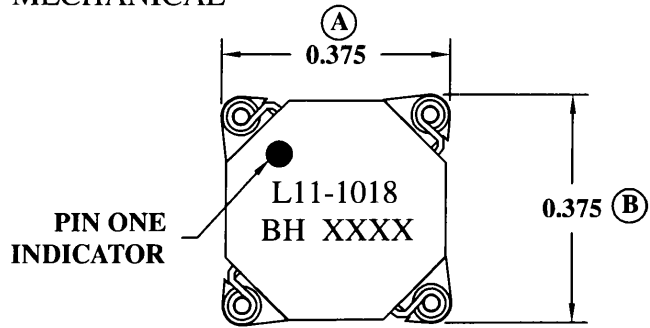



MECHANICAL

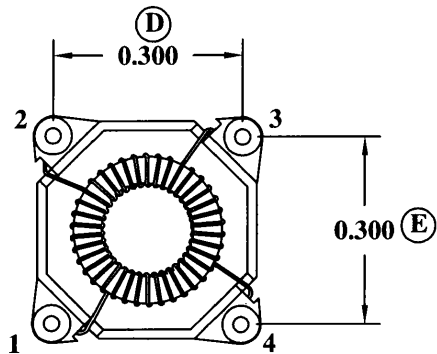


NOTE: LABEL MUST NOT EXTEND OVER EDGES OF CASE.

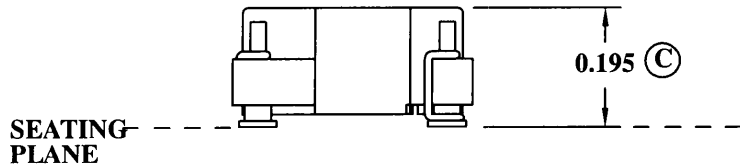

RECOMMENDED PC BOARD LAYOUT

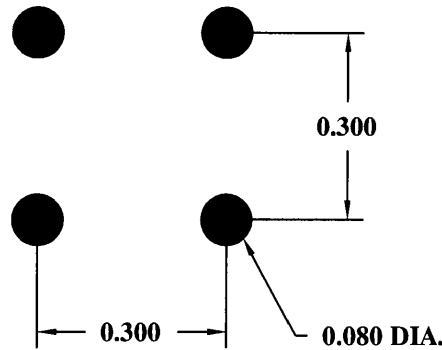



SCHEMATIC

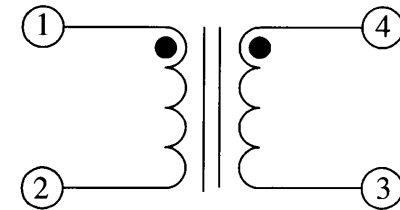


ELECTRICAL SPECIFICATIONS


TURNS RATIO: 1:1
 OPEN CIRCUIT INDUCTANCE: 30 μ H \pm 20% @ 0 ADC (1-2)
 24.0 μ H TYP. @ 1.11 ADC (1-2)
 10 KHz 100mV
 DC RESISTANCE: 0.1980 OHMS NOM. (1-2) (3-4)
 IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS Compliant

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX \pm .01 .XXX \pm .005	TITLE:
					INDUCTOR
					PART NO.
					L11-1018
A	9-8-05	CUSTOMER PRINT			
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	

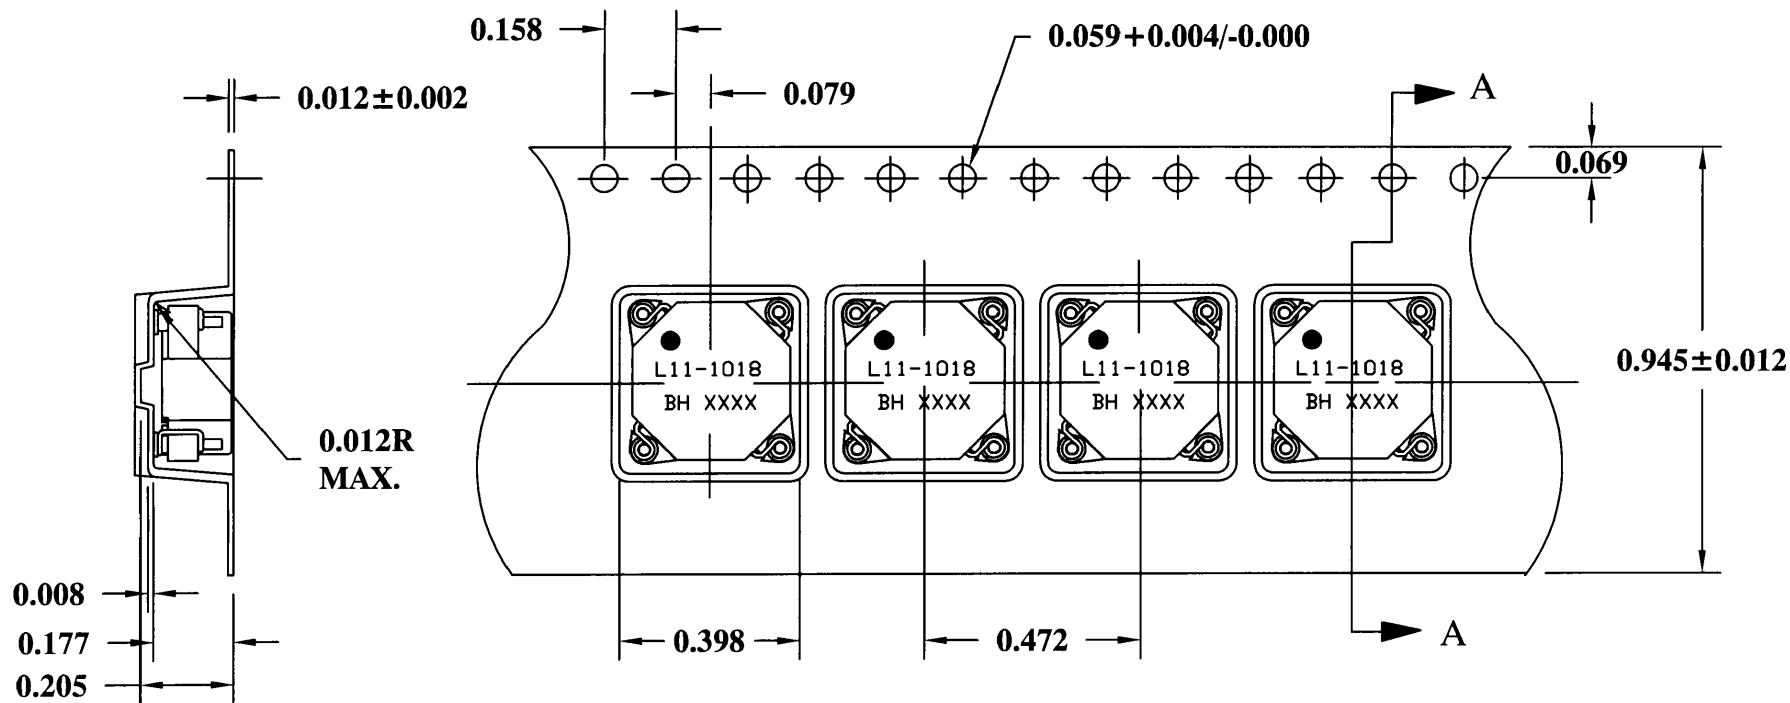

CARRIER TAPE 811-0187

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	TITLE: INDUCTOR
A	9-8-05	CUSTOMER PRINT			PART NO. L11-1018
ISSUE	DATE	REVISION	BY	PAGE 2 OF 2	