

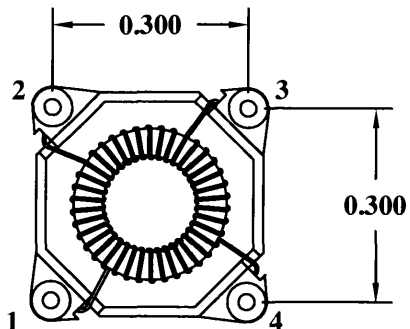
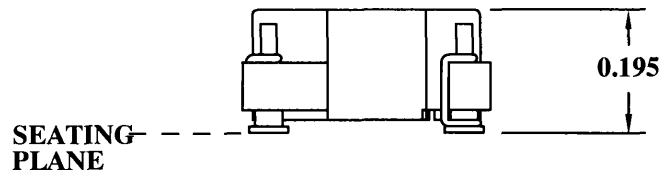



MECHANICAL

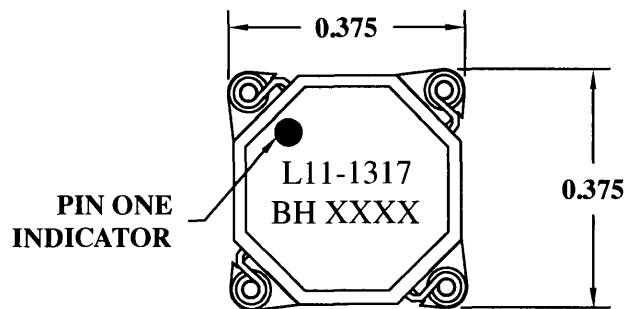

SUGGESTED PAD LAYOUT

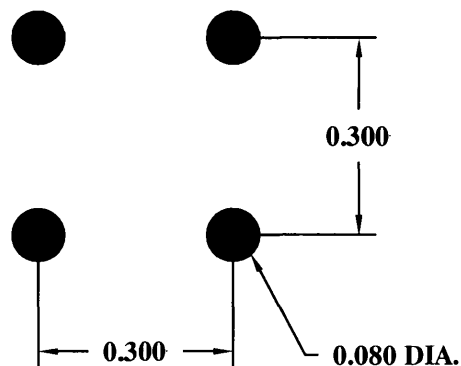

SCHEMATIC

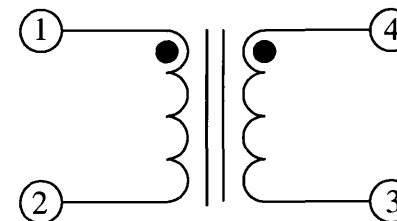

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1

OPEN CIRCUIT INDUCTANCE: 24.81 μ H \pm 20% @ 0 ADC (1, 4 - 2, 3) 10 KHz 50mV



19.8 μ H TYP. @ 1.22 ADC (1, 4 - 2, 3) 10 KHz 100mV


PRIMARY LEAKAGE INDUCTANCE: 0.25 μ H MAX. (1-2 SH 4, 3) 120 KHz 50mV

DC RESISTANCE: 0.40 OHMS MAX. (1-2) (3-4)

HIGH VOLTAGE TEST: 3000 VAC (1-4)


RoHS COMPLIANT

				DESIGN PER:	CATALOG		 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<input type="checkbox"/> CUSTOM <input type="checkbox"/> NON-PROPRIETARY <input checked="" type="checkbox"/> X			
				DRAWN:	K. LOFTUS		TITLE:
				ENGR:	J. DECRAMER		
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX \pm .01 .XXX \pm .005			PART NO.
A	4-25-11	CUSTOMER PRINT		PAGE 1 OF 2			
ISSUE	DATE	REVISION	BY				

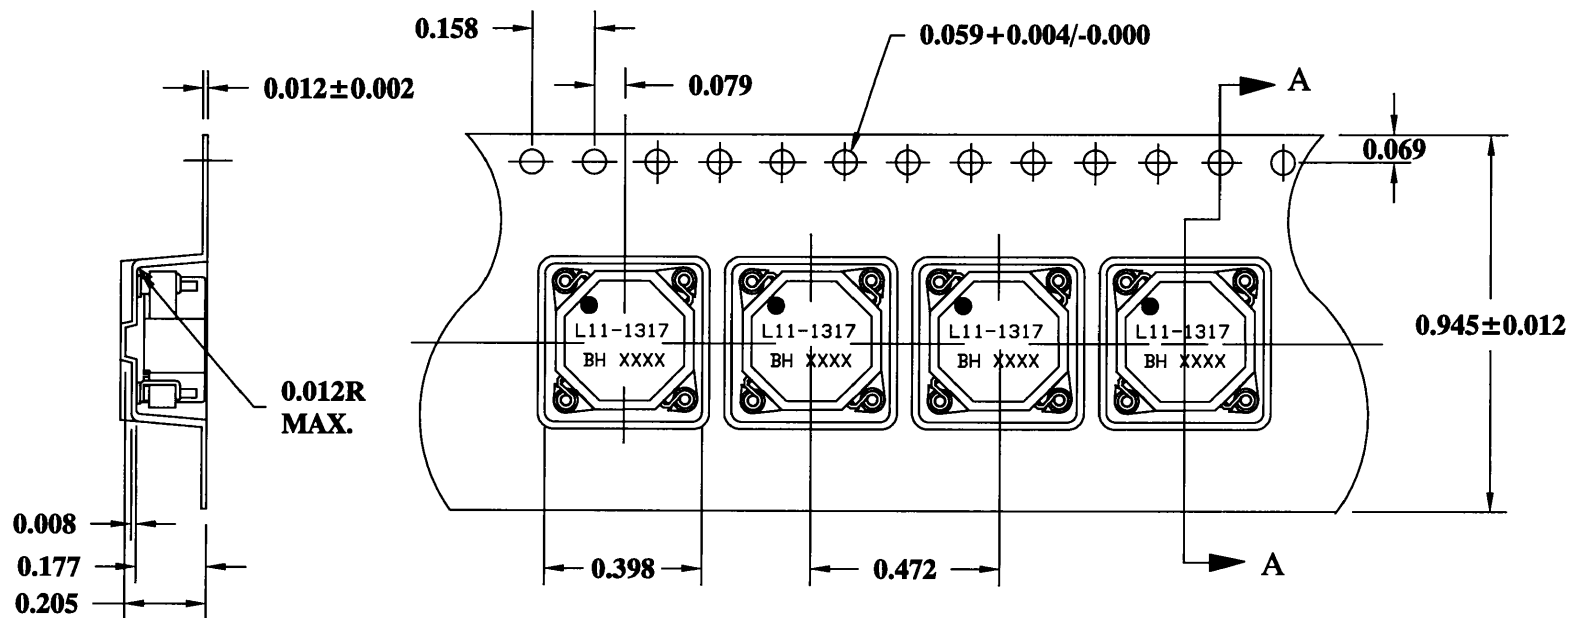

CARRIER TAPE 811-0187

RoHS COMPLIANT

				DESIGN PER:		 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				CATALOG		
				<input type="checkbox"/> CUSTOM <input type="checkbox"/> NON-PROPRIETARY <input checked="" type="checkbox"/> X		
				DRAWN: K. LOFTUS		
				ENGR: J. DECRAMER		TITLE: INDUCTOR
A	4-25-11	CUSTOMER PRINT		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		PART NO. L11-1317
ISSUE	DATE	REVISION	BY			PAGE 2 OF 2