
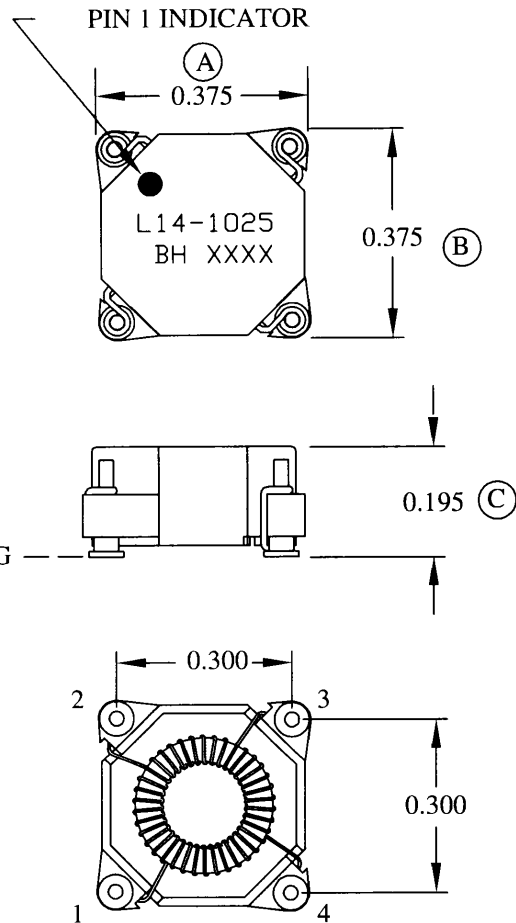



MECHANICAL

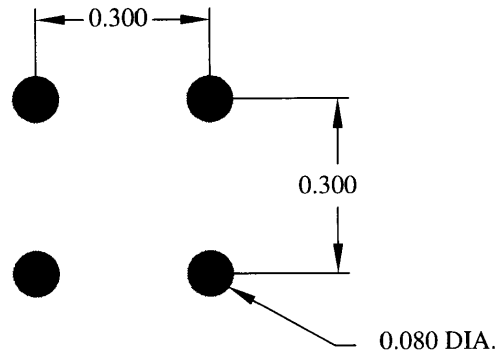

FOOTPRINT






SCHEMATIC

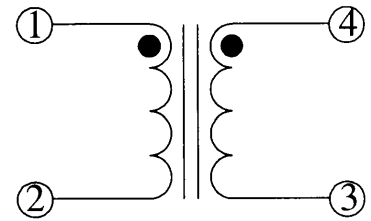


ELECTRICAL SPECIFICATIONS

- URNS RATIO: 1:1
- OPEN CIRCUIT INDUCTANCE: 8.23 μ H \pm 10% @ 0 ADC (1, 4 - 2, 3)
10 KHz 50mV
- DC BIAS: 5.35 μ H TYP. @ 3.46 ADC (1, 4 - 2, 3)
10 KHz 50mV
- DC RESISTANCE: 0.056 OHMS NOM. (1, 4 - 2, 3)
- IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG <input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX \pm .01 .XXX \pm .005	
A	2-6-09	CUSTOMER PRINT			TITLE: INDUCTOR
ISSUE	DATE	REVISION	BY		PART NO. L14-1025

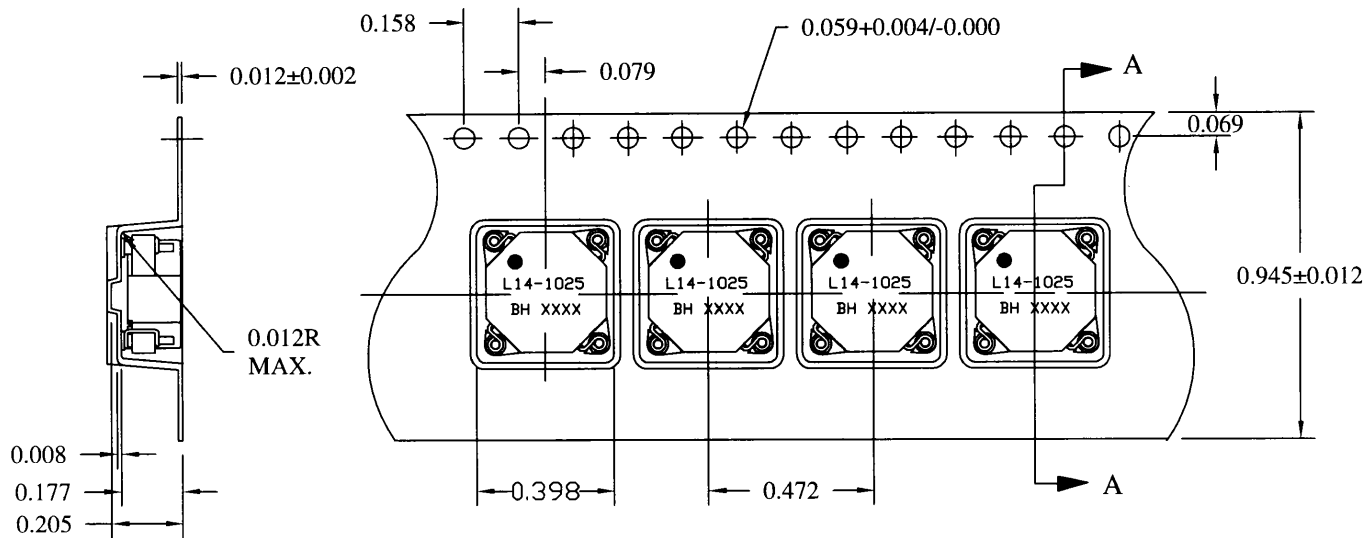

CARRIER TAPE 811-0187

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
				CUSTOM NON-PROPRIETARY <input checked="" type="checkbox"/>	
				DRAWN: K. LOFTUS	
				ENGR: J. DECRAMER	TITLE:
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	INDUCTOR
A	2-6-09	CUSTOMER PRINT			PART NO.
ISSUE	DATE	REVISION	BY	PAGE 1 OF 2	L14-1025