




MECHANICAL

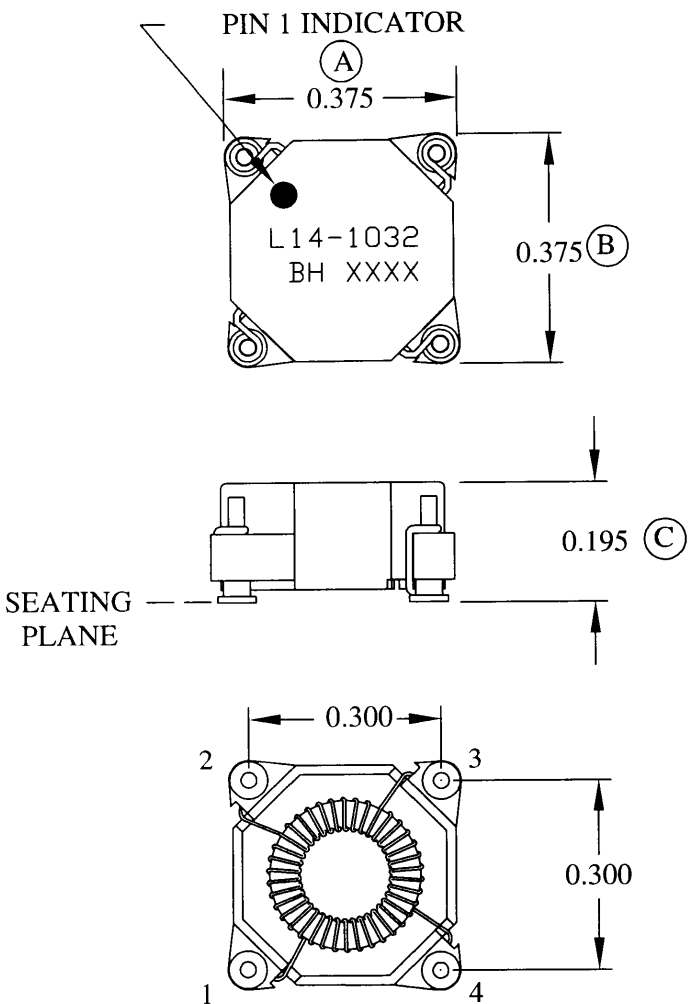

SUGGESTED PAD LAYOUT

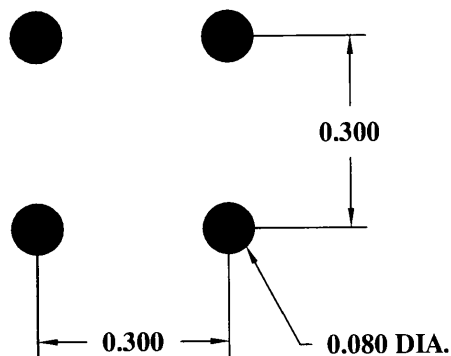

SCHEMATIC

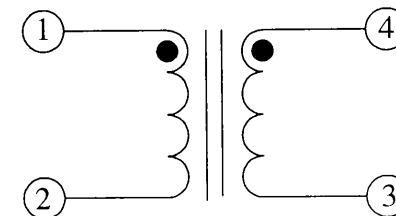

ELECTRICAL SPECIFICATIONS

URNS RATIO: 1:1



OPEN CIRCUIT INDUCTANCE: 22.03 μ H \pm 10% @ 0 ADC (1, 4 - 2, 3) 10 KHz 50mV


DC BIAS: 14.32 μ H TYP. @ 2.12 ADC (1, 4 - 2, 3)
10 KHz 50mV

DC RESISTANCE: 0.145 OHMS MAX. (1, 4 - 2, 3)


IR: 1K MEGOHMS MIN. @ 100 VDC (1-4)

RoHS COMPLIANT

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN
				BH CATALOG	
				<input type="checkbox"/> CUSTOM <input type="checkbox"/> NON-PROPRIETARY <input checked="" type="checkbox"/> X	© 1998 BH Electronics
				DRAWN: K. LOFTUS	TITLE: INDUCTOR
				ENGR: J. DECRAMER	
A	10-18-07	CUSTOMER PRINT	 BY	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX \pm .01 .XXX \pm .005	PART NO. L14-1032
ISSUE	DATE	REVISION			

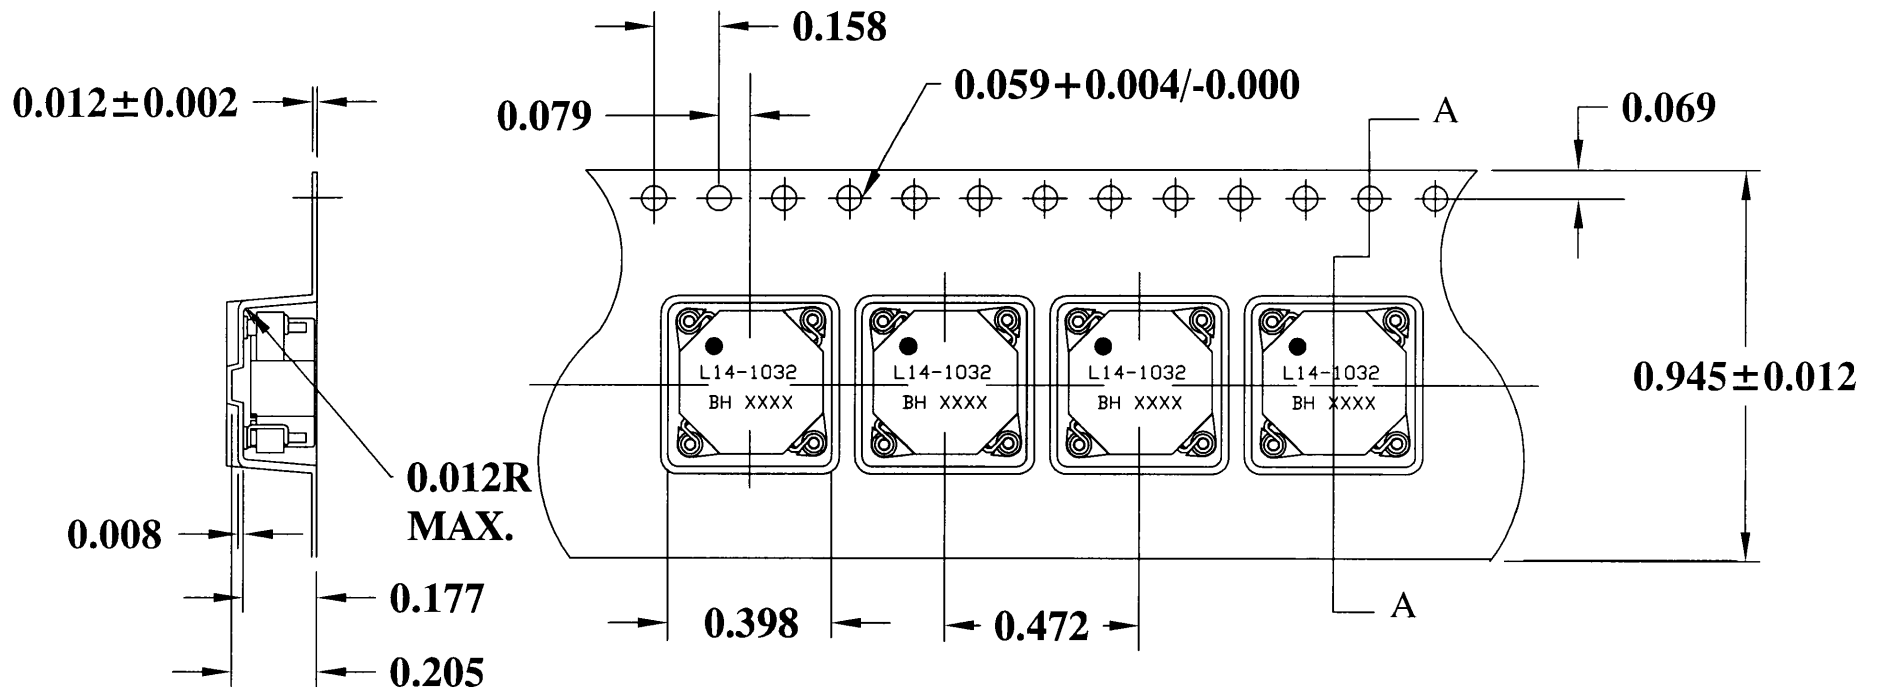

CARRIER TAPE 811-0187

				DESIGN PER:	BH CATALOG	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				<input type="checkbox"/> CUSTOM <input checked="" type="checkbox"/> NON-PROPRIETARY		
				DRAWN:	K. LOFTUS	TITLE: INDUCTOR
				ENGR:	J. DECRAMER	
				UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005		PART NO. L14-1032
A	10-18-07	CUSTOMER PRINT		PAGE 2 OF 2		
ISSUE	DATE	REVISION	BY			