

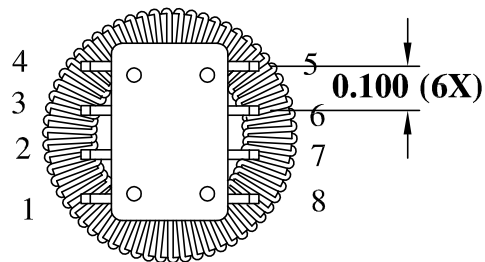
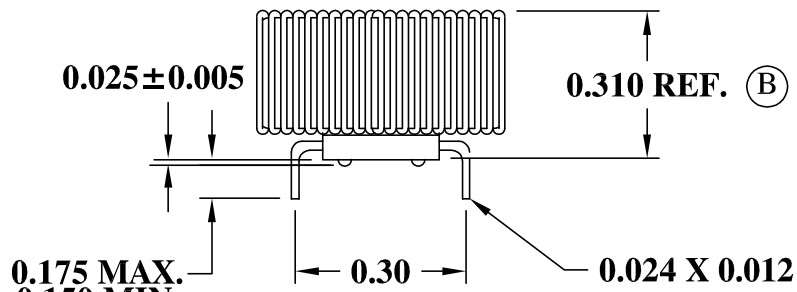


MECHANICAL

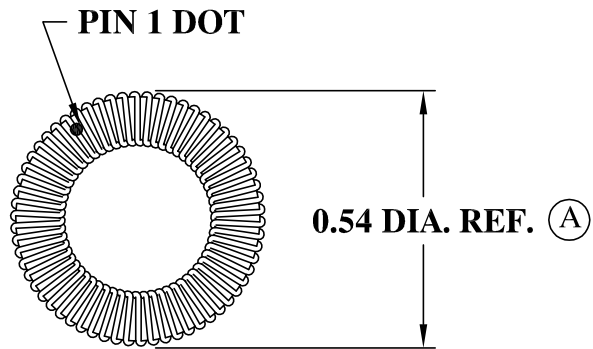


SCHEMATIC



ELECTRICAL SPECIFICATIONS

TURNS RATIO: 1:1
 OPEN CIRCUIT INDUCTANCE: 140uH±20% (1-8) 120 KHz 50mV
 PRIMARY LEAKAGE INDUCTANCE: 3uH MAX.
 HIGH VOLTAGE TEST: 1200 VAC / 1 SEC.

				DESIGN PER:	 BH ELECTRONICS, INC. BURNSVILLE & MARSHALL, MN © 1998 BH Electronics
				BH CATALOG	
F	2-13-12	NOW BH CATALOG	JDC	DRAWN: K. LOFTUS	TITLE: TRANSFORMER PART NO. 500-1463
E	9-25-00	ECR #4821 UPDATE TO CAD	JDC	ENGR: J. DECRAMER	
D	10-2-96	ECR #2963 120 KHz 50mV	JDC	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
C	12-10-92	CUSTOMER PRINT			
ISSUE	DATE	REVISION	BY	PAGE 1 OF 1	